

CHECK VALVES

402B/402 Drinking Water Check Valve (Double Check/NRV)

Flanged - Predates Current Regulations

Pressure rating 16 bar (DN200, DN280, DN300 10 bar). Max temp. 100°. A double check valve composed of 2 standard range WRAS approved single non return valves, type 402, coupled together. 350mm and 400mm available on request.

TYPE	PRODUCT CODE	SIZE	FLANGE
402B/402	149B16023	DN50	PN10/16
402B/402	149B16024	DN65	PN10/16
402B/402	149B16025	DN80	PN10/16
402B/402	149B16026	DN100	PN10/16
402B/402	149B16028	DN150	PN10/16
402B/402	149B22024	DN200	PN16
402B/402	149B20017	DN250	PN16
402B/402	149B21124	DN300	PN16



508 Ball Type Non Return Valve for Water, Waste Water Loaded Liquids


Cast Iron Body Resin Ball BSP

Pressure rating 10 bar. Max temp. 80°. GJL Cast Iron External Epoxy Coated Casing. Resin Ball. NBR (Nitrile) Seal.

TYPE	PRODUCT CODE	SIZE	MM
508	149B3204	DN1 1/2"	10
508	149B3205	DN2"	10
508	149B3206	DN2 1/2"	10



A	RB	C	D	WEIGHT	
"	MM	MM	MM	KG	
1	26/34	76	114	95	1.3
1 1/4	33/42	85	132	110.5	1.9
1 1/2	40/49	93	145	121	2.45
2	50/60	107	173.5	144	3.5
2 1/2	66/76	127	200	174.5	5.90

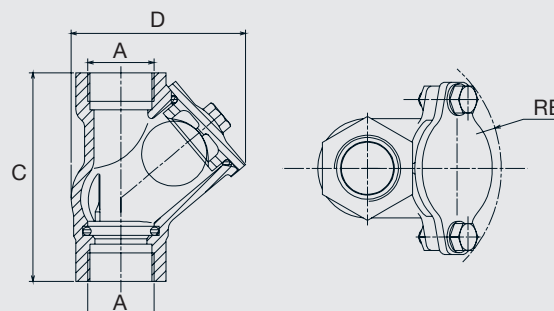

CHECK VALVES

402 Drinking Water Check Valve (Single Check/NRV) Flanged - Predates Current Regulations




Pressure rating 16 bar (DN200, DN250, DN300 10 bar). Max temp. 100°. GJL cast iron, epoxy coated casing.
2 undrilled bosses. EPDM Seal. Stainless Steel. Type 402 Closing System DN 40 Brass, DN 50 and 65 bronze.
Other DN: Cast iron with Bronze Stem. Note: DN200, DN250 and DN300 not WRAS approved.

TYPE	PRODUCT CODE	SIZE	FLANGE
402	149B2282	DN50	PN10/16
402	149B2283	DN65	PN10/16
402	149B2284	DN80	PN10/16
402	149B2285	DN100	PN10/16
402	149B2226	DN125	PN10/16
402	149B2227	DN150	PN10/16
402	149B002849	DN200	PN16
402	149B002851	DN250	PN16
402	149B002853	DN300	PN16



A	B	C	D	WEIGHT
"	MM	MM	MM	KG
2	50	100	97	5.8
2 1/4	65	120	125	8.1
3	80	140	150	10.2
4	100	170	187	14.5
5	125	200	220	24
6	150	230	250	32
8	200	289	340	53
10	250	354	420	94
12	300	396	490	140

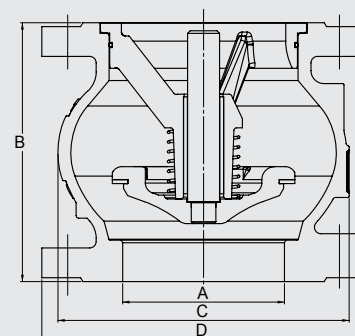


895 Double Plate (Duo Type) Non Return Valve Stainless Plates - Between Flange PN10-16

Pressure rating 16 bar. Max temp. 100°. GJL Cast Iron Epoxy Coated Body (DN50 to 150)GJS Ductile Iron Epoxy Coated (DN200 to 400). Stainless Steel Plates (304). EPDM Seal. Stainless Steel Spring.

TYPE	PRODUCT CODE	SIZE	FLANGE
895	149B3220	DN50	PN10/16
895	149B3221	DN65	PN10/16
895	149B3222	DN80	PN10/16
895	14B3223	DN100	PN10/16
895	149B3224	DN125	PN10/16
895	149B3225	DN150	PN10/16
895	149B3226	DN200	PN16



A	B	C	D	WEIGHT
"	MM	MM	MM	KG
2	50	54	60	1.2
2 1/2	65	54	73	1.8
3	80	57	89	2.9
4	100	64	114	3.9
5	125	70	141	5.8
6	150	76	168	8
8	200	95	219	14

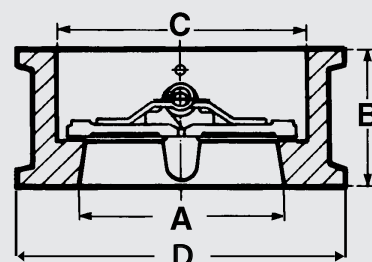

CHECK VALVES

635E Single Plate Non Return Valve**Coated Steel Plate - Between Flanges PN10**

Pressure rating 16 bar (DN200 10 bar). Max temp. 110°. Steel Cataphoresis Coated Body & Plate.
EPDM Seal on Seat.

TYPE	PRODUCT CODE	SIZE	FLANGE
635E	149G3551	DN50	PN10
635E	149G3552	DN65	PN10
635E	149F021283	DN80	PN10
635E	149F021284	DN100	PN10
635E	149F021285	DN125	PN10
635E	149F021286	DN150	PN10
635E	149F021287	DN200	PN10



DN MM	A MM	D MM	E MM	WEIGHT KG
50	32	109	16	1,000
65	42	129	16	1,500
80	54	144	16	1,750
100	71	162	16	2,100
125	95	194	16	2,700
150	114	220	19	4,400
200	164	275	28	7,000

