


Media: air, water, fluid, gas
 Pressure range: 0.3 to 16 Bar max*
 Media temperature: -5°C to +100°C
 Ambient temperature: 0°C to +60°C
 Media viscosity: 50 centistokes max
 Cycle life: 500,000 cycles
 Opening / Closing Time: 3 – 5 Sec



2/2 Bronze

DN50 – DN300

NORMALLY CLOSED

2 WAY SERVO ASSISTED

0.3 – 16* Bar

TYPE BFE-B



PRESSURE

Ø Port PN16	Ø Orifice (mm)	Flow Cv	Pressure Rating (Bar) ΔP		Seals	Part Number		
			Min	Max				
DN50	50	37	0.3	10*	NBR (80°C) *FKM (100°C)	BFE50B + seal + voltage		
DN65	65	85	0.3	10*		BFE65B + seal + voltage		
DN80	80	110	0.3	10*		BFE80B + seal + voltage		
DN100	100	150	0.3	10*		BFE100B + seal + voltage		
DN125	125	230	0.3	10*		BFE125B + seal + voltage		
DN150	150	450	0.3	10*		BFE150B + seal + voltage		
DN200	200	580	0.3	10*		BFE200B + seal + voltage		
DN250	250	910	0.3	10*		BFE250B + seal + voltage		
DN300	300	1300	0.3	10*		BFE300B + seal + voltage		

OPTIONS

IP65 Coil & Connector PG11 – DIN 43650 A
 Manual Over ride lever valve
 *16 Bar rated solenoid controller with M17 high power coil
 ATEX EExmIIT4 II 2G & 2D IP65 T130°C coil. 
 Other flange options JIS10K, JIS20K, ANSI150Lb
 Other custom flange types, sizes, seals and media applications available upon request

ELECTRICAL DATA

Voltage (-10% +10%) Continuous Duty 100%		Coil	Power Consumption		Insulation Class	Enclosure	Electrical Connections
~			Inrush	Holding			
~	24 – 110 – 230 (50 or 60 Hz)	M16	70 VA	35 VA	F 155°C	IP65 with connector	3 spades DIN 43650A DIN40050 VDE0110
=	12 - 24		16 Watts				
~	110 – 230 (50 or 60 Hz)	*M17	35VA	26VA	N 200°C		
=	24		19 Watts				

CONSTRUCTION

Body: Bronze (Pressure tested to 21 bar)
 Piston, Seat & Shaft: Bronze
 Bolts: Brass
 Spring: Stainless steel
 Ports: Flanged PN16 RF
 Seals and gaskets: NBR (+80°C) or Viton (+100°C)
 Control pipe work circuit & fittings: Copper & Brass


REPAIR KIT

Piston U Ring Seal	SP + Valve Part Number – PISTON U RING
External Control Pipework + Solenoid	BFE-NC + seal - PIPEWORK + voltage

OVERALL DIMENSIONS

Port	L	A	Kg
DN50	190	187	12
DN65	210	192	15
DN80	225	210	18
DN100	250	222	24
DN125	280	235	32
DN150	310	260	44
DN200	420	300	87
DN250	470	335	152
DN300	530	370	202

Media: Air, Water, Gas or Liquid
 Pressure range: 0.3 to 16 bar max*
 Media temperature: -5°C to +100°C
 Ambient temperature: 0°C to +60°C
 Media viscosity: 50 centistokes max
 Cycle life: 500,000 cycles
 Opening / Closing Time: 3 – 5 Sec



2/2 Ductile Iron

DN50 – DN500

2 WAY NORMALLY CLOSED

SERVO ASSISTED

0.3 – 16* Bar

TYPE BFE-DE



PRESSURE

Ø Port PN16	Ø Orifice (mm)	Flow Cv	Pressure Rating (Bar) ΔP		Seals	Part Number		
			Min	Max*				
DN50	50	37	0.3	10*	NBR (80°C) FKM (100°C)	BFE50D + seal + voltage		
DN65	65	85	0.3	10*		BFE65D + seal + voltage		
DN80	80	110	0.3	10*		BFE80D + seal + voltage		
DN100	100	150	0.3	10*		BFE100D + seal + voltage		
DN125	125	230	0.3	10*		BFE125D + seal + voltage		
DN150	150	450	0.3	10*		BFE150D + seal + voltage		
DN200	200	580	0.3	10*		BFE200D + seal + voltage		
DN250	250	910	0.3	10*		BFE250D + seal + voltage		
DN300	300	1300	0.3	10*		BFE300D + seal + voltage		
DN350	350	1800	0.3	10		BFE350D + seal + voltage		
DN400	400	2300	0.3	10		BFE400D + seal + voltage		
DN450	450		0.3	10		BFE450D + seal + voltage		
DN500	500		0.3	10		BFE500D + seal + voltage		

OPTIONS

IP65 Coil & Connector PG11 – DIN 43650 A
 Manual Over ride lever valve
 *16 Bar rated solenoid controller and pipework with M17 high power coil
 ATEX 22003EX Coil: ATEX EExmIIT4 II 2G & 2D IP65 T130°C 
 Flange options JIS10K, JIS20K, ANSI150Lb
 Other custom flanges, larger sizes, seals, media and pressures available upon request

ELECTRICAL DATA

Voltage (-10% +10%) Continuous Duty 100%		Coil	Power Consumption		Insulation Class	Enclosure	Electrical Connections
			Inrush	Holding			
~	24 – 110 – 230 (50 or 60 Hz)	M16	70 VA	35 VA	F 155°C	IP65 with connector	3 spades DIN 43650A DIN 40050 VDE 0110
=	12 – 24 – 48 - 125		26 Watts				
~	110 – 230 (50 or 60 Hz)	*M17	35VA	26VA	N 200°C		
=	24		19 Watts				


CONSTRUCTION

Body: Ductile Iron with Epoxy Coating (Pressure tested to 16 bar)
 Piston, Seat & Shaft: Bronze
 Bolts: Brass
 Spring: Stainless steel
 Ports: Flanged PN16 RF
 Seals and gaskets: NBR (+80°C max), Viton (+100°C max)
 Control pipe work circuit & fittings: Copper & Brass

REPAIR KIT


Piston U Ring seal	SP + Valve Part Number – PISTON U RING
External Control Pipework + Solenoid	BFE - NC + seal – PIPEWORK + voltage

OVERALL DIMENSIONS

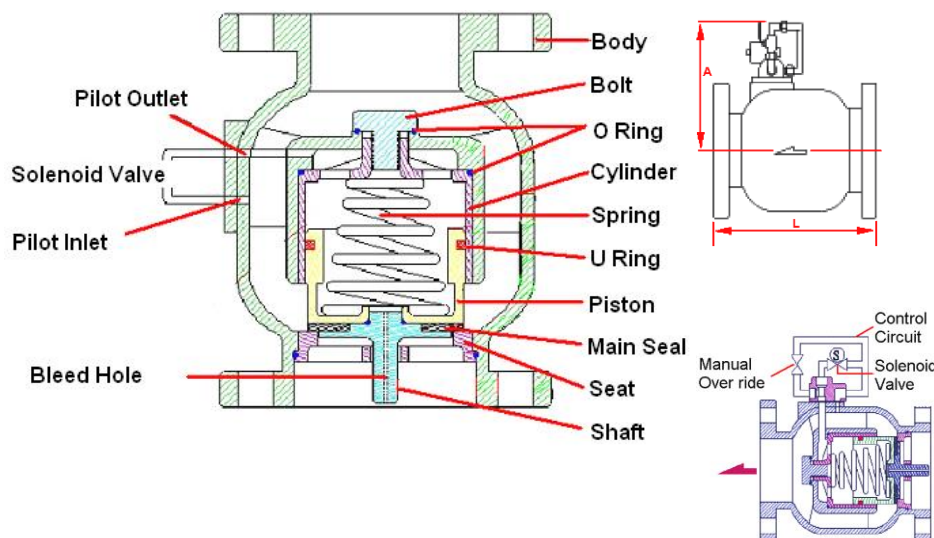

Port	L	A	Kg
DN50	190	187	12
DN65	210	192	15
DN80	225	210	18
DN100	250	222	24
DN125	280	235	32
DN150	310	260	44
DN200	420	300	87
DN250	470	335	152
DN300	530	370	202
DN350	600	415	285
DN400	600		
DN450	750		
DN500	750		

Media: air – water – gas – light oil
 Pressure range: 0.5 to 15 Bar max
 Media temperature: -40°C +160°C max
 Ambient temperature: -20°C to +60°C
 Media viscosity: 50 centistokes max
 Mounting: coil upright
 Opening / Closing time: 50 mSec Max



2/2 Brass

3/8 – 3"

NORMALLY CLOSED

2 WAY SERVO ASSISTED

0.5 – 15 Bar

TYPE PU225®



PRESSURE

Ø Port BSP	Ø Orifice (mm)	Flow	Coil	Pressure Rating (Bar) ΔP		Max Working	Seals	Max Media Temp. °C	Part Number	
		Kv Ltr/ min		Min	Max					
3/8	13	40.0	22003	0.5	10	15	NBR FKM EPDM	80 130 160	PU22503 + voltage PU22503V + voltage PU22503E + voltage	
1/2	13	40.0	22003	0.5	10	15	NBR FKM EPDM	80 130 160	PU22504A + voltage PU22504AV + voltage PU22504AE + voltage	
3/4	25	165.0	22003	0.5	10	15	NBR FKM EPDM	80 130 160	PU22506A + voltage PU22506AV + voltage PU22506AE + voltage	
1	25	165.0	22003	0.5	10	15	NBR FKM EPDM	80 130 160	PU22508A + voltage PU22508AV + voltage PU22508AE + voltage	
1 1/4	38	367	22003	0.5	10	15	NBR FKM EPDM	80 130 160	PU22512A + voltage PU22512AV + voltage PU22512AE + voltage	
1 1/2	38	500	22003	0.5	10	15	NBR FKM EPDM	80 130 160	PU22514A + voltage PU22514AV + voltage PU22514AE + voltage	
2	50	600	22003	0.5	10	15	NBR FKM EPDM	80 130 160	PU22520A + voltage PU22520AV + voltage PU22520AE + voltage	
2 1/2	65	1050	16W	0.3	10	15	NBR FKM EPDM	80 140 120	PU22524A + voltage PU22524AV + voltage PU22524AE + voltage	
3	80	1380	16W	0.3	10	15	NBR FKM EPDM	80 140 120	PU22528A + voltage PU22528AV + voltage PU22528AE + voltage	

OPTIONS

IP65 Coil & Connector PG9 – DIN 43650 A

NPT Thread (Not available 2 1/2" & 3")

ATEX EExmII T4 II 2G & 2D IP65 T130°C

Explosion proof enclosure ATEX II 2 G/D EExdIICT6 IP65 +85°C

ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%		Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
			Inrush	Holding			
~	12-24-48-110-220-240-380 (50/60 Hz)	22003	23VA	17VA	H 180°C	IP 65 with connector	3 spades DIN 43650A DIN 40050 VDE 0110
=	12 – 24 – 48 -110- 220 (DC)		15 Watts				
~	24-48-110-230 (50/60 Hz)	16W	25VA	15VA	F 155°C		
=	12 – 24 – 48 (DC)		16 Watts				

CONSTRUCTION

Body: Forged Brass SS41, Tube and internal parts: Stainless steel




Seals and gaskets: NBR (Optional EPDM, FKM & HNBR)

Moulded coil: 16 W Resin / 22003 DuroPlast ThermoSet Resin

REPAIR KIT


Diaphragm Seal	225 + Size code (03-28) + seal material
Coil	Coil type (22003 or 16W) + voltage
Armature assembly (Normally Closed)	225320VNC

OVERALL DIMENSIONS

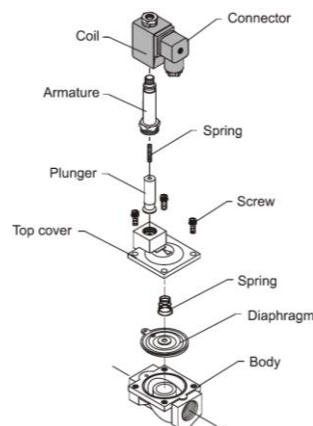

Port	A	B	C	Kg
3/8 1/2	66.5	106.5	48	0.725
3/4 1	96	126.5	70	1.565
1 1/4 1 1/2	131	145.5	96	2.56
2	130	160.5	112	3.9
2 1/2	245	186	184	9.5
3	250	196	184	11.23

Media: air – water – gas – fluid
 Pressure range: 0.5 to 15 Bar max
 Media temperature: -40°C to +160°C max
 Ambient temp: -20° to +60° C max
 Media viscosity: 50 centistokes
 Mounting: coil upright
 Opening / Closing: 50 mSec Max



2/2 Brass Flanged

DN10 – DN50
 NORMALLY CLOSED
 2 WAY SERVO ASSISTED
 0.5 – 15 Bar
 TYPE PU225F®



PRESSURE

Ø Port PN16	Ø Orifice (mm)	Flow	Pressure Rating (Bar) ΔP		Max Working	Seals	Max Media Temp. °C	Part Number	
		Kv Ltr/ min	Min	Max					
DN10	13	40	0.5	10	15	NBR FKM EPDM	80 130 160	PU22503F4 + voltage PU22503F4V + voltage PU22503F4E + voltage	
DN15	13	40	0.5	10	15	NBR FKM EPDM	80 130 160	PU22504F4 + voltage PU22504F4V + voltage PU22504F4E + voltage	
DN20	25	165	0.5	10	15	NBR FKM EPDM	80 130 160	PU22506F4 + voltage PU22506F4V + voltage PU22506F4E + voltage	
DN25	25	165	0.5	10	15	NBR FKM EPDM	80 130 160	PU22508F4 + voltage PU22508F4V + voltage PU22508F4E + voltage	
DN32	40	450	0.5	10	15	NBR FKM EPDM	80 130 160	PU22512F4 + voltage PU22512F4V + voltage PU22512F4E + voltage	
DN40	40	450	0.5	10	15	NBR FKM EPDM	80 130 160	PU22514F4 + voltage PU22514F4V + voltage PU22514F4E + voltage	
DN50	50	600	0.5	10	15	NBR FKM EPDM	80 130 160	PU22520F4 + voltage PU22520F4V + voltage PU22520F4E + voltage	

OPTIONS

IP65 Coil & Connector PG9 – DIN 43650 A
 ATEX 22003EX Coil: ATEX EExmIIT4 II 2G & 2D IP65 T130°C
 Explosion Proof Enclosure: EExdIICT6 ATEX II 2 G/D IP65 (Custom made)
 ANSI150Lb(F3), JIS10K (F) or other flange

ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%		Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
			Inrush	Holding			
~	12-24-48-110-220-240-380 (50/60 Hz)	22003	23VA	17VA	H 180°C	IP 65 with connector	3 spades DIN 43650A DIN 40050 VDE 0110
=	12 - 24 – 48-110-220 (DC)		15 Watts				


CONSTRUCTION

Body: Forged Brass SS41, Flanges: Stainless steel, Tube and internal parts: Stainless steel
 Seals and gaskets: NBR (Optional EPDM, FKM or HNBR)
 Moulded coil: DuroPlast / ThermoSet Resin


REPAIR KIT

Diaphragm seals	225 + size code (03-20) + material
Coil	22003 + voltage
Complete armature assembly	225320NC + seal material


OVERALL DIMENSIONS

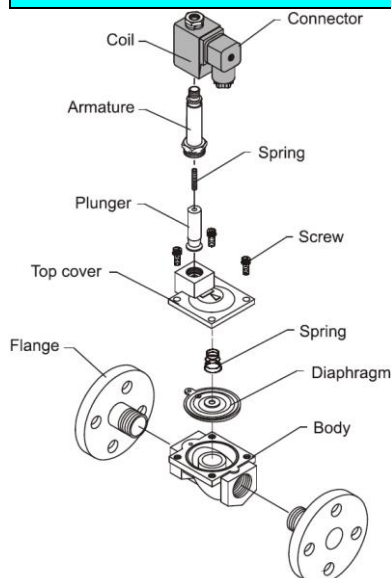

Model	PU225 03F	PU225 04F	PU225 06F	PU225 08F	PU225 12F	PU225 14F	PU225 20F
Flange	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	110.0	110.0	120.0	150.0	180.0	180.0	210.0
B	45.0	47.5	50.0	62.5	67.5	70.0	77.5
C	136.0	138.5	157.5	165.5	173.0	182.5	209.5
Kg	2.13	2.1	2.43	2.41	3.34	3.32	7.55

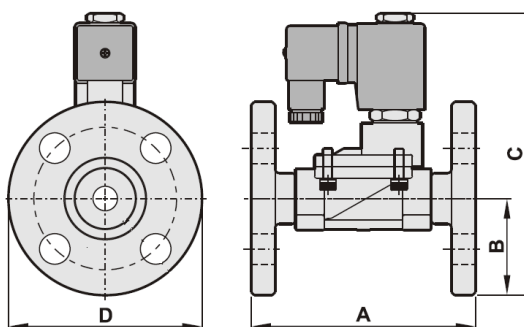

Media: air – water – gas – light oil
 Pressure range: 0.5 to 25 Bar max
 Media temperature: -10°C to +90°C max
 Ambient temperature: -10° to +60°C
 Media viscosity: 50 centistokes max
 Mounting: coil upright
 Opening / Closing time: 50 mSec Max



2/2 Brass

3/8 - 1

NORMALLY CLOSED

2 WAY SERVO ASSISTED

0.5 – 25 Bar

TYPE PU225H®



PRESSURE

Ø Port BSP	Ø Orifice (mm)	Flow Kv Ltr/ min	Pressure Rating (Bar) ΔP		Seals	Part Number	
			Min	Max			
3/8	8	19.0	0.5	25	NBR	PU225HB03 + voltage	
					EPDM	PU225HE03 + voltage	
					FKM	PU225HV03 + voltage	
1/2	8	19.0	0.5	25	NBR	PU225HB04A + voltage	
					EPDM	PU225HE04A + voltage	
					FKM	PU225HV04A + voltage	
3/4	13	40.0	0.5	25	NBR	PU225HB06A + voltage	
					EPDM	PU225HE06A + voltage	
					FKM	PU225HV06A + voltage	
1	13	40.0	0.5	25	NBR	PU225HB08A + voltage	
					EPDM	PU225HE08A + voltage	
					FKM	PU225HV08A + voltage	

OPTIONS

IP65 Coil & Connector PG9 DIN 43650 AI
 ATEX 22003EX Coil: ATEX EExmIIT4 II 2G & 2D IP65 T130°C
 NPT Thread

ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%		Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
			Inrush	Holding			
~	12-24-48-110-220- 240-380 (50/60 Hz)	22003	23VA	17VA	H 180°C	IP 65 with connector	3 spades DIN 43650A DIN 40050 VDE 0110
=	12-24-48-110-220 (DC)		15 Watts				


CONSTRUCTION

Body: Forged Brass SS41 (Test Pressure 30 Bar)
 Tube and Internal Parts: Stainless steel
 Diaphragm: Nylon reinforced EPDM



REPAIR KIT

Diaphragm Seal	225H + size code (03-08) + seal material
Coil	22003 + voltage
Armature assembly	225320VNC + seal material

OVERALL DIMENSIONS

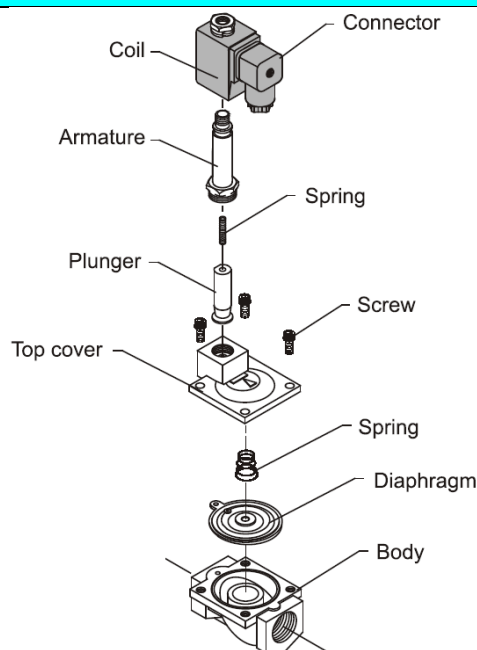


Model	PU225H03	PU225H04	PU225H06	PU225H08
Port	3/8	1/2	3/4	1
A	66.5	66.5	96.0	96.0
B	106.5	106.5	126.5	126.5
C	48	48	70	70
Kg	0.775	0.755	1.55	1.5

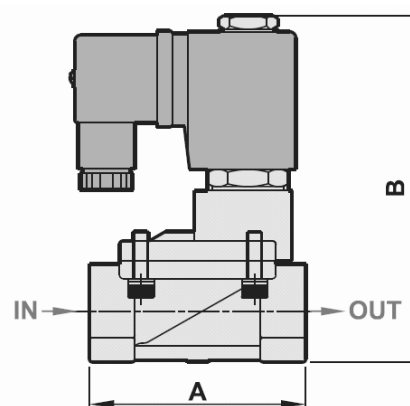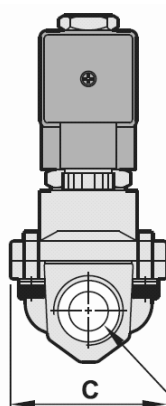

© Copyright (PU225H 26062017) whole or partial reproduction of this catalogue or page without written consent is strictly prohibited.

Media: air – water – light oil- gas - fluid
 Pressure range: 0.5 to 50 Bar
 Media temperature: -10 °C to +90 °C Max
 Ambient temperature: -10 °C to +60 °C
 Media viscosity: 50 centistokes max
 Mounting: Coil upright
 Opening/Closing time: 500 mSec Max



2/2 Brass

3/8 – 1

NORMALLY CLOSED

2 WAY SERVO ASSISTED

0.5 – 50 Bar

TYPE PU225X®



PRESSURE

Ø Port BSP	Ø Orifice (mm)	Flow Kv Ltr/ min	Pressure Rating (Bar) ΔP		Part Number	
			Min	Max		
3/8	13	75	0.5	50	PU225X03 + voltage	
1/2	13	75	0.5	50	PU225X04 + voltage	
3/4	25	200	0.5	50	PU225X06 + voltage	
1	25	200	0.5	50	PU225X08 + voltage	

OPTIONS

IP65 Coil & Connector PG9 – DIN 43650 A
 ATEX 22003EX Coil: ATEX EExmIIT4 II 2G & 2D IP65 T130°C 
 NPT Thread
 Other custom made options available upon request

ELECTRICAL DATA

Voltage (-10% + 10%) Duty rating 100%		Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
			Inrush	Holding			
~	12-24-48-110-220-240-380 (50/60 Hz)	22003	23VA	17VA	H 180°C	IP 65 with connector	3 spades DIN 43650 DIN 40050 VDE 0110
=	12-24-48-110-220 (DC)		15 Watts				


CONSTRUCTION

Body: Forged Brass
 Tube, Piston and internal parts: Stainless steel
 Seals and gaskets: PTFE + NBR
 Moulded coil: Resin
 Test Pressure: 75 bar


REPAIR KIT

Coil	22003 + Voltage
Complete Armature assembly	SP + Valve Part Number -ARMATURE
Piston Set	SP + Valve Part Number -PISTON


OVERALL DIMENSIONS

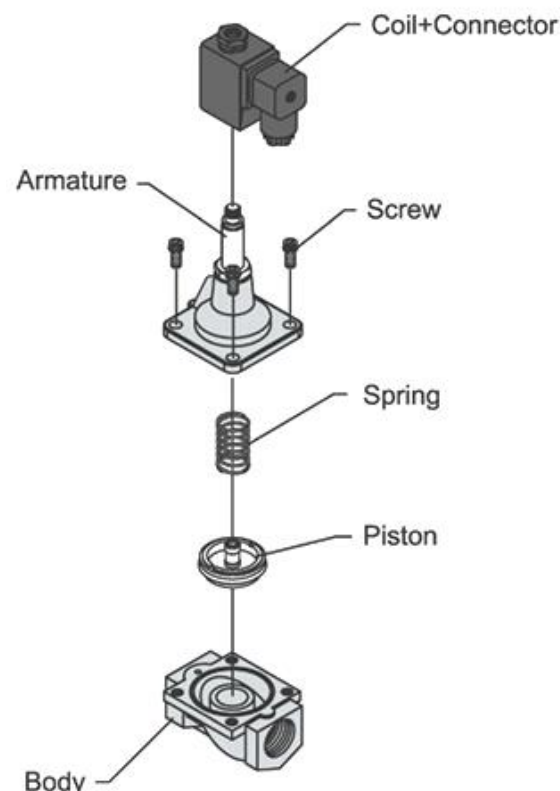

Model	Port	A	B	C	Kg
PU225X03	3/8	66.5	106.5	48	0.86
PU225X04	1/2	66.5	106.5	48	0.84
PU225X06	3/4	100	126.5	70	1.8
PU225X08	1	100	126.5	70	1.75

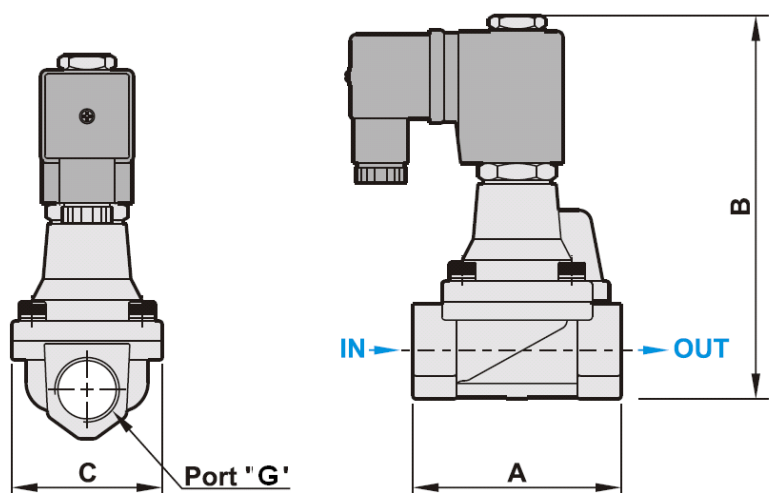

Media: air – water – light oil - steam
 Pressure: 0.5 to 120 Bar max
 Media temperature: +180°C Max
 Ambient temperature: -30°C to +60°C
 Media viscosity: 50 centistokes max
 Mounting: coil upright
 Opening / Closing 200 mSec Max



2/2 Brass

3/8 – 2

NORMALLY CLOSED

2 WAY SERVO ASSISTED

0.5 – 40, 80 & 120 Bar

TYPE SAH HH & HHH



PRESSURE

Ø Port BSP	Ø Orifice (mm)	Flow Kv Ltr/ min	Pressure Rating (Bar) ΔP			Part Number
			Min	Max Steam	Max Air/ Water	
3/8	15	75	0.5	12	40	SA14H + voltage
1/2	15	75	0.5	12	40	SA15H + voltage
3/4	20	155	0.5	12	40	SA20H + voltage
1	25	220	0.5	12	40	SA25H + voltage
1 1/4	35	433	0.5	12	40	SA35H + voltage
1 1/2	35	433	0.5	12	40	SA40H + voltage
2	50	800	0.5	12	40	SA50H + voltage
3/8	15	75	0.5	12	80	SA14HH + voltage
1/2	15	75	0.5	12	80	SA15HH + voltage
3/4	20	155	0.5	12	80	SA20HH + voltage
1	25	220	0.5	12	80	SA25HH + voltage
1 1/4	35	433	0.5	12	80	SA35HH + voltage
1 1/2	35	433	0.5	12	80	SA40HH + voltage
2	50	800	0.5	12	80	SA50HH + voltage

OPTIONS

IP67 (EN60529:1991+A1:2000) UL + CSA approved Coil + IP65 LED Connector PG11 DIN43650A

NPT Thread

ATEX 22003EX Coil: ATEX EExmIIT4 II 2G & 2D IP65 T130°C (Custom Made 25 Bar Max)

120 Bar SAHHH (2x SAHH 80 Bar price)

ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%		Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
			Inrush	Holding			
~	24 – 110 – 230 (50/60 Hz) DIN	WPG2	18.7VA	15.3VA	H 180°C	IP 65 With Connector	3 spades DIN 43650 DIN 40050 VDE0110
=	12 – 24 DC DIN		18 Watts				

CONSTRUCTION


Body: Brass, Tube and Spring: 304 Stainless Armature: 430F Stainless Other internal parts: Stainless steel

Seals and gaskets: PTFE, Moulded coil: Resin

REPAIR KIT

Coil	WPG2 + voltage
Piston	SP210 + Valve Part Number


OVERALL DIMENSIONS

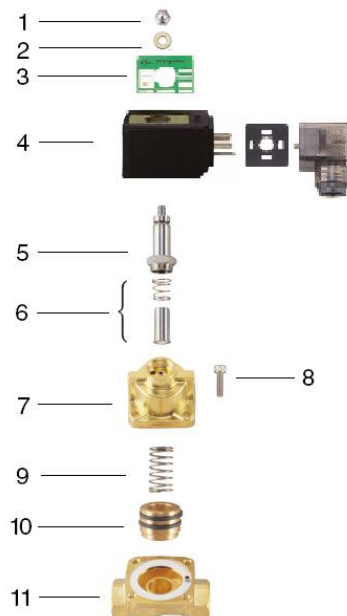


Model	A	B	C	D	E	F	G	H	Kg
SA14	67	48	123	67	52	42	1/2	15	1.1
SA15	67	48	123	67	52	42	1/2	15	1.1
SAH20	96	72	149	67	52	42	3/4	25	1.53
SAH25	96	72	149	67	52	42	1	25	1.85
SA35	120	90	168	52	45	41	1 1/4	33	3.3
SA40	120	90	168	52	45	41	1 1/2	33	3.25
SA50	150	122	203	52	45	41	2	40.5	6.8

Item	Part No:	Description
1	SP201-*	Nut
2	SP202-*	Washer
3	SP203-*	Name Plate
4	WPG2-*	Coil
5	SP205-*	Core Tube
6	SP206-*	Armature Core
7	SP207-*	Valve Bonnet
8	SP208-*	Bolt
9	SP209-*	Piston Spring
10	SP210-*	Piston
11	SP211-*	Valve Body

* = Model Number

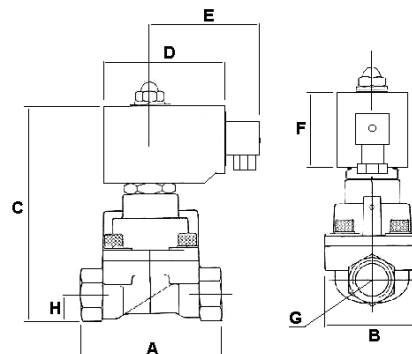

Media: air – water – gas – light oil
 Pressure range: 1 to 100 Bar max
 Media temperature: -30°C +120°C max
 Ambient temperature: -20°C to +60°C
 Media viscosity: 50 centistokes max
 Mounting: coil upright
 Weight: 660g
 Opening / Closing time: 100 mSec Max



2/2 Brass

1/8 – 3/8

NORMALLY CLOSED

2 WAY SERVO ASSISTED

1 – 100 Bar

TYPE SAP



PRESSURE

Ø Port BSP	Ø Orifice (mm)	Flow	Pressure Rating (Bar) ΔP		Part Number
		Kv Ltr/ min	Min	Max	
1/8	5.0	7.2	1	100	SAP6150 + voltage
1/4	5.0	7.2	1	100	SAP8150 + voltage
3/8	5.0	7.2	1	100	SAP10150 + voltage

OPTIONS

IP67 (EN60529:1991+A1:2000) UL + CSA Approved Coil & IP65 LED Connector PG11 – DIN 43650 A
 EPDM, NBR, SILICONE, VST, CR, ECO, HNBR and Hypalon seals (40 Bar Max)
 NPT Thread
 Silver Shading Ring
 Other custom made options available upon request

ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%		Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
			Inrush	Holding			
~	24 - 48 - 110 - 230 (50 or 60 Hz)	WPG2	18.7VA	15.3VA	H 180°C	IP 65 with connector	3 spades DIN 43650 DIN 40050 VDE 0110
=	12 – 24 - 48 (DC)		18 Watts				

CONSTRUCTION

Body: Brass
 Tube and Spring: 304 Stainless Armature: 430F Stainless Other internal parts: Stainless steel
 Seals and gaskets: PTFE (Optional EPDM, NBR, SILICONE, VST, CR, ECO, HNBR and Hypalon)
 Moulded coil: Resin

REPAIR KIT

Coil	WPG2 + voltage
Complete plunger + O' ring Assembly	SP210 + Valve Part Number

OVERALL DIMENSIONS

Part Number	A	B	C	D	E	F	G	H
SAP 6150	41	19	88	-	58	65	15	10.5
SAP 8150	41	19	88	-	58	65	15	10.5
SAP 10150	41	19	88	-	58	65	15	10.5

