

ultravalve

— Your single source valve stockist - est 1986 —

22A SERIES



FABRICATION RANGE *LUG BUTTERFLY VALVE*

UTILIZATION:

- Lug butterfly valve used for supplying, pumping, irrigation, drinking water supply, treatment and pumping of dirty waters, etc.
- It has low head loss, and it is 100% watertight.

22 - SERIES

LUG BUTTERFLY VALVES




GENERAL FEATURES:

- Low head loss.
- 100% watertight.
- Bidirectional flow.
- No gaskets needed for installation.
- Stainless steel bolts.
- Max. working pressure 16 bar.
- Working temperature between -10°C and 90°C.

STANDARDS APPLIED:

- Hydrostatic tests according to EN 12266-1, class A.
- EC Directive.
- Flange holes according to ISO 7005-2.
- Distance between flanges according to EN 558 series 20.
- Top flange (optional) according to ISO 5211.

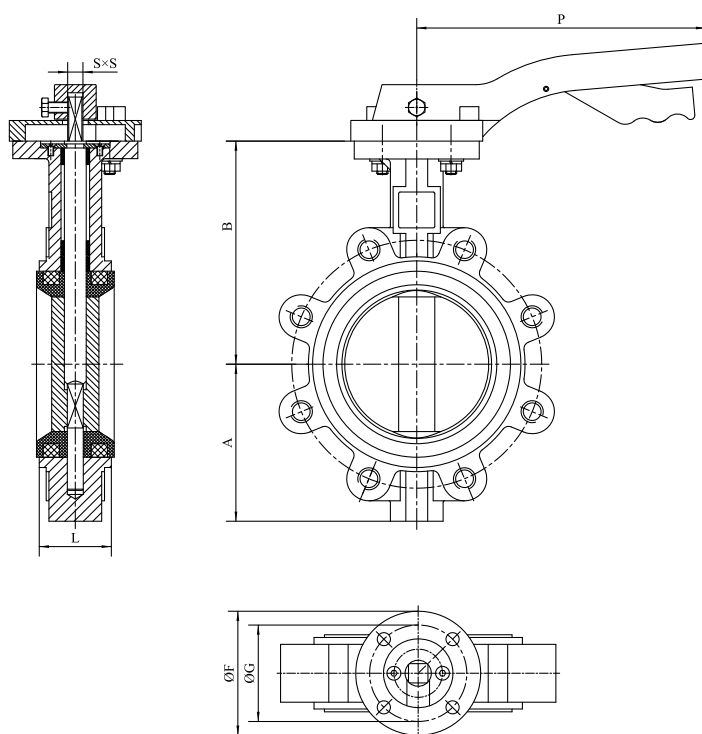



DIMENSIONS

DN	A	B	F	G	P	S
40	70	124	65	50	198	9
50	76	129	65	50	198	9
65	89	126	65	50	198	9
80	95	144	65	50	198	9
100	114	162	90	70	270	11
125	127	188	90	70	270	14
150	139	204	90	70	270	14
200	177	238	90	70	270	17
250	203	282	125	102	540	22
300	242	311	125	102	540	22

The images and drawings are non contractual.
The specifications of the shown products could vary without previous notice.

22 - SERIES

LUG BUTTERFLY VALVES

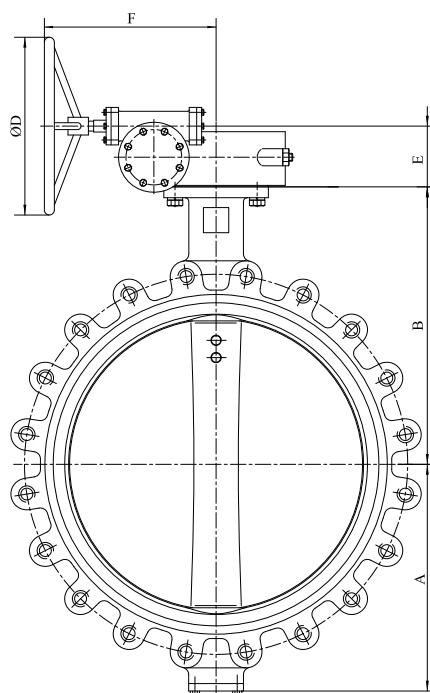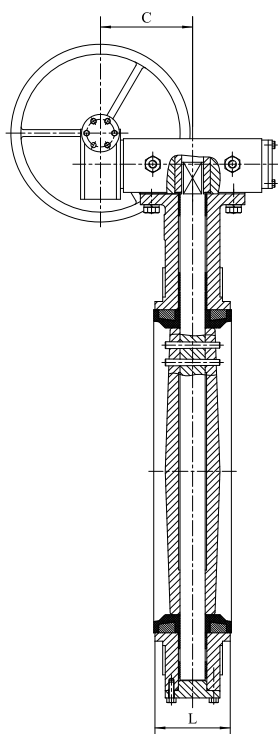


DIMENSIONS

DN	A	B	C	D	E	F	L
350	277	368	80	278	37	225	77
400	308	400	98	376	52	291	102
450	342	422	99	376	52	291	114
500	374	479	170	285	120	252	130
600	459	562	195	376	135	295	152
700	520	624	240	376	172	353	165
800	575	672	240	376	172	353	190
900	635	768	250	420	185	385	207
1000	685	823	250	420	185	385	216
1200	839	940	310	495	247	468	276

22 - SERIES

LUG BUTTERFLY VALVES

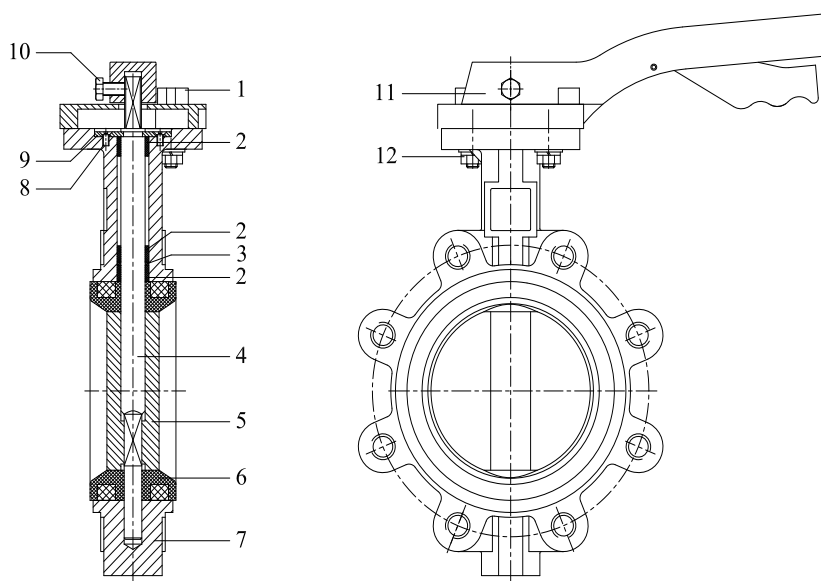

DESCRIPTION

1	LOCKING PLATE	ALUMINUM
2	BUSHING	PTFE
3	O-RING	EPDM
4	STEM	AISI 420
5	DISC	GJS400 / CF8M
6	SEAT	EPDM
7	BODY	GJS400
8	SCREW	A2
9	THRUST WASHER	CARBON STEEL
10	SCREW	A2
11	LEVER	ALUMINUM/CAST IRON
12	BOLTS AND NUTS	A2
	PAINTING RAL 5015	Epoxy 250 μ m

ultravalve

— Your single source valve stockist - est 1986 —



21A SERIES



FABRICATION RANGE WAFER BUTTERFLY VALVE

UTILIZATION:

- Wafer butterfly valve used for supplying, pumping, irrigation, drinking water supply, treatment and pumping of dirty waters, etc.
- It has low head loss, and it is 100% watertight.



01384 411 888 - sales@ultravalve.co.uk - ultravalve.co.uk

SERIE - 21

VÁLVULAS DE MARIPOSA WAFER




GENERAL FEATURES:

- Low head loss.
- 100% watertight.
- Bidirectional flow.
- No gaskets needed for installation.
- Stainless steel bolts.
- Max. working pressure 16 bar.
- Working temperature between -10°C and 90°C.

STANDARDS APPLIED:

- Hydrostatic tests according to EN 12266-1, class A.
- EC Directive.
- Distance between flanges according to EN 558 series 20.
- Top flange (optional) according to ISO 5211.

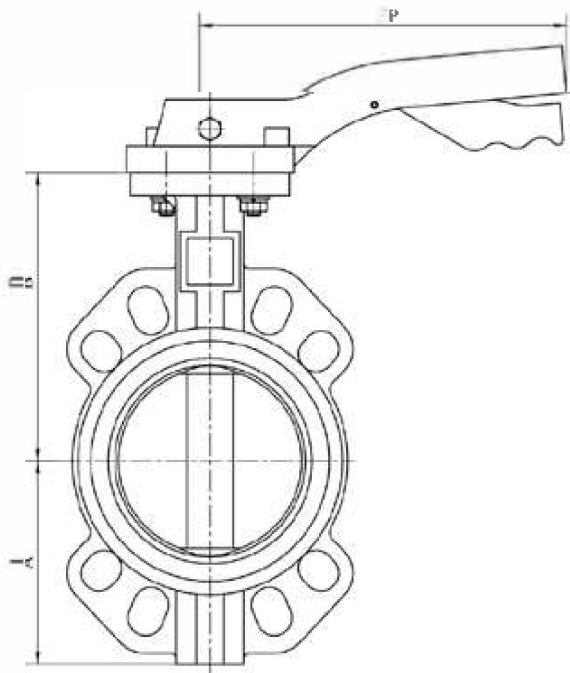

DIMENSIONS

DN	A	B	P	Face to Face dist.	Weight
40	70	124	198	33	1.9
50	76	129	198	43	2.5
65	89	136	198	46	2.9
80	95	144	198	46	3.9
100	114	162	270	52	5.2
125	127	188	270	56	7.0
150	139	204	270	56	8.4
200	177	238	270	60	12.0
250	203	282	540	68	22.0
300	242	311	540	78	29.0


The images and drawings are non contractual.
The specifications of the shown products could vary without previous notice.

TOP CONNECTION

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
FLANGE	F05	F05	F05	F05	F07	F07	F07	F10	F10	F10	F10	F16	F16	F16	F16
SHAFT	9x9	9x9	9x9	9x9	11x11	14x14	14x14	17x17	22x22	22x22	22x22	27x27	27x27	27x27	36x36

SERIE - 21

VÁLVULAS DE MARIPOSA WAFER

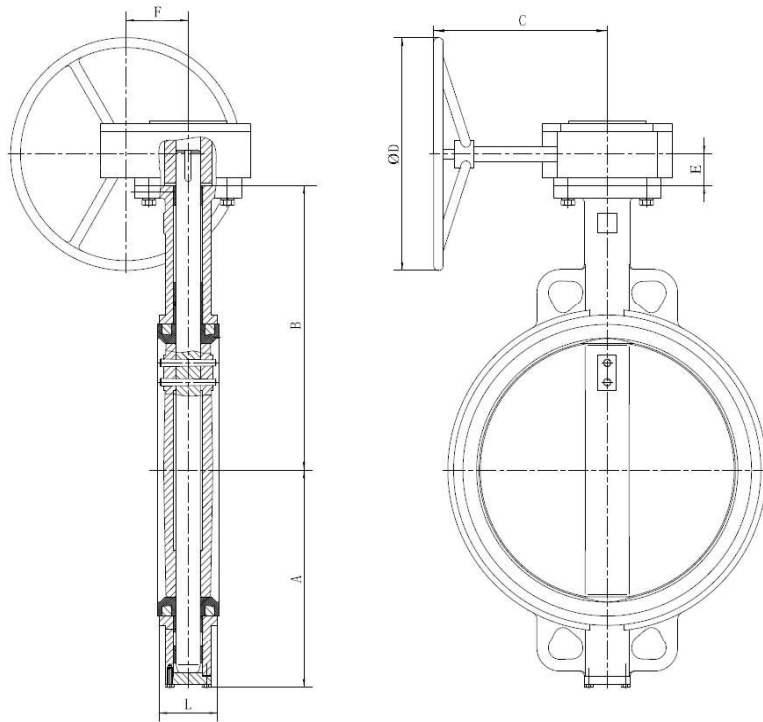


DIMENSIONS

DN	A	B	C	D	E	F	L	Weight	DN	A	B	C	D	E	F	L	Weight
40	79	145	144	260	27	43	33	4,5	350	277	368	226	81	42	81	78	46,0
50	85	162					43	5,0	400	308	400	217	125	48	95	102	75,0
65	98	174					45	5,5	450	342	422	217	125	48	95	114	89,0
80	104	181					45	6,0	500	374	479	320	360	115	185	127	128,0
100	123	200					52	7,4	600	459	562	335	360	120	185	154	206,0
125	136	213	208	360	39	66	54	9,4	700	520	624	353	376	172	240	165	332,0
150	148	225					56	10,7	800	575	672	353	376	17	240	190	436,0
200	186	260					60	19,8	900	635	768	385	420	1185	250	203	616,0
250	212	292					66	28,7	1000	685	823	385	420	185	250	216	700,8
300	251	337					77	37,4	1200	839	940	468	495	247	310	254	960,0

SERIE - 21

VÁLVULAS DE MARIPOSA WAFER

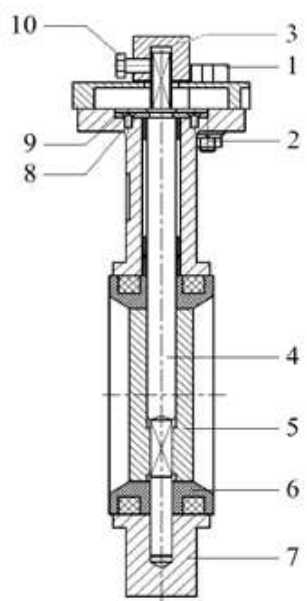

DESCRIPTION

1	BOLTS	A2
2	NUTS	A2
3	LEVER	ALUMINUM / GJS400
4	SHAFT	AISI 420
5	DISC	GJS400 / CF8M / AL- BRONZE / DUPLEX
6	SEAT	EPDM
7	BODY	GJS400
8	O-RINGS	EPDM
9	HOLDING PLATE	STEEL 8.8
10	BOLT	A2
	PAINTING RAL 5015	Epoxy 250 µm