

# X-stainless steel ball valves, reduced bore

press fit / press fit, EN (DIN), DN 15-50 (18-54 mm), reduced bore

|                                     |                                                    |
|-------------------------------------|----------------------------------------------------|
| Body                                | DN 15-50 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Ball                                | DN 15-50 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Ball seal                           | DN 15-50 PTFE+C                                    |
| Stem                                | DN 15-50 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Stem seal                           | DN 15-50 FPM/NBR                                   |
| Operation                           | DN 15-50 with composite handle                     |
| Press fit connection's O-ring (LBP) | DN 15-50 CIIR                                      |




## Operation conditions


-30 ° – +120 °C

Below 0 °C contact manufacturer

Over +120 °C contact manufacturer

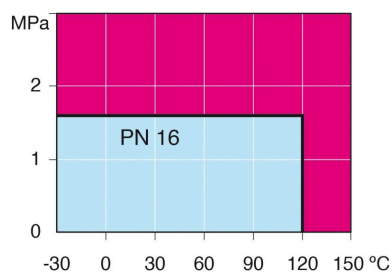

DN 15-50

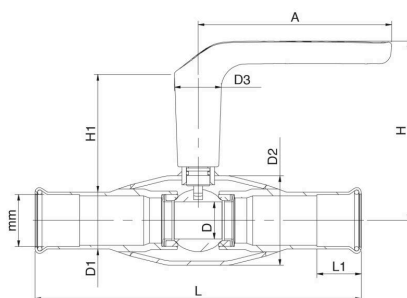

Not for steam

| DN | PN | Product no. Vexve | mm | A   | D  | D1   | D2   | D3   | H   | H1 | L   | L1 | kg  |
|----|----|-------------------|----|-----|----|------|------|------|-----|----|-----|----|-----|
| 15 | 16 | 238015X           | 18 | 130 | 10 | 21.3 | 33.7 | 32.0 | 108 | 75 | 220 | 25 | 0.6 |
| 20 | 16 | 238020X           | 22 | 130 | 15 | 25.4 | 42.4 | 32.0 | 112 | 77 | 220 | 25 | 0.8 |
| 25 | 16 | 238025X           | 28 | 130 | 20 | 31.4 | 48.3 | 32.0 | 116 | 78 | 220 | 25 | 1.0 |
| 32 | 16 | 238032X           | 35 | 130 | 25 | 38.3 | 60.3 | 32.0 | 121 | 79 | 220 | 30 | 1.3 |
| 40 | 16 | 238040X           | 42 | 130 | 32 | 45.5 | 70.0 | 32.0 | 128 | 84 | 220 | 30 | 1.5 |
| 50 | 16 | 238050X           | 54 | 130 | 50 | 58.0 | 88.9 | 32.0 | 136 | 84 | 220 | 30 | 2.3 |

