

Pneumatically Actuated Two-Way Brass Ball Valves

8P007900, 8P008100



8P007900 - Double Acting

Valve with Double Acting Actuator


	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	40	40	40	40	40	40	40	40	25	16	16
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2	3"	4"
B	115	115	115	120	135	144	203	221	259	279	345
C	98	98	98	100	111	114	166	175	202	211	262
D	45	45	45	45	45	45	71	71	81	81	106
E	67	67	67	76	90	102	114	138	165	188	225
F	110	110	110	110	110	110	141	141	164	164	241
ACT.	DA 32	DA 32	DA 32	DA 32	DA 32	DA 32	DA 52	DA 52	DA 63	DA 63	DA 85

8P008100 - Single Acting

Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	40	40	40	40	40	40	40	40	25	16	16
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2	3"	4"
B	151	151	151	156	172	180	214	232	291	311	358
C	134	134	134	136	147	151	177	186	234	243	275
D	71	71	71	71	71	71	81	81	106	106	123
E	67	67	67	76	90	102	114	138	165	188	225
F	141	141	141	141	141	141	164	164	241	241	275
ACT.	SR 52	SR 52	SR 52	SR 52	SR 52	SR 52	SR 63	SR 63	SR 85	SR 85	SR 100

8P007900* Double Acting, **8P008100*** Single Acting:
2 way brass with chrome plated ball,
(Part Number 2500) seals in P.T.F.E + VITON, threaded
F/F, with pneumatic actuator. Not suitable for use with
solvents.

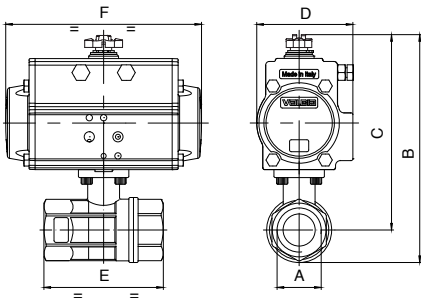

Pneumatically Actuated Three-Way Brass Ball Valves

8P008300 (T), 8P008400 (L) 8P008500 (T), 8P008600 (L)



8P008300 (T) - 8P008400 (L)

Valve with Double Acting Actuator

	*02	*03	*04	*05	*06	*07	*08	*10
PN	30	30	30	30	16	10	10	10
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"
B	113	113	118	167	179	197	230	272
C	96	96	98	143	149	161	187	216
D	45	45	45	71	71	71	81	95
E	67	67	77	87	105	123	139	166
F	110	110	110	141	141	141	164	210
G	34	34	39	44	53	62	70	83
ACT.	DA 32	DA 32	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75


8P008500 (T) - 8P008600 (L)

Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10
PN	30	30	30	30	16	10	10	10
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"
B	149	149	154	179	190	209	262	299
C	132	132	134	155	160	173	219	243
D	71	71	71	81	81	81	106	123
E	67	67	77	87	105	123	139	166
F	141	141	141	164	164	164	241	275
G	34	34	39	44	53	62	70	83
ACT.	SR 52	SR 52	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100

Please specify the flow path when ordering.

8P008300* (T), **8P008400*** (L), **8P008500*** (T),
8P008600* (L):
3 way brass ball valve CW 617N (Part Number 3500
(T) - 3600 (L)), seals in P.T.F.E + VITON, threaded
F/F/F, FULL bore, "T" or "L" port, with pneumatic
actuator. Not suitable for use with solvents.

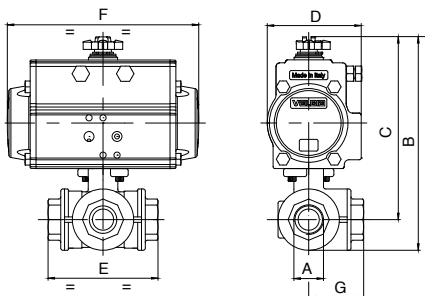

NEW


Pneumatically Actuated Three-Way 'T' Port Brass Diverter Ball Valves

8P014800 (T), 8P015000 (T)



8P014800* (T), 8P015000* (T):

Diverter brass CW 617N ball valve (Part Number 3110 (T)), full bore, female threaded, "T" port, with pneumatic actuator.

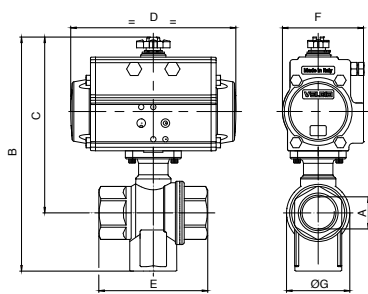

8P014800 (T)

Valve with Double Acting Actuator

	*02	*03	*04	*05	*06	*07	*08	*10
PN	25	25	25	16	16	10	10	10
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	120	120	130	147	157	206	225	253
C	94	94	96	107	110	151	163	180
D	110	110	110	110	110	141	141	164
E	52	52	64	74	89	100	110	130
F	45	45	45	45	45	71	71	81
G	28	28	35	43	53	63	77	93
ACT.	DA 32	DA 32	DA 32	DA 32	DA 32	DA 52	DA 52	DA 63

8P015000 (T)

Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10
PN	25	25	25	16	16	10	10	10
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	156	156	166	184	194	205	254	285
C	130	130	133	144	147	151	193	212
D	141	141	141	141	141	141	210	241
E	52	52	64	74	89	100	110	130
F	71	71	71	71	71	71	95	106
G	28	28	35	43	53	63	77	93
ACT.	SR 52	SR 52	SR 52	SR 52	SR 52	SR 52	SR 75	SR 85

Please specify the flow path when ordering.

NEW


Pneumatically Actuated Three-Way 'L' Port Brass Diverter Ball Valves

8P015100 (L)



8P015100* (L):

Diverter brass ball valve (Part Number 3210 (L)), full bore, female threaded, "L" port, with pneumatic actuator rotation 0°-180°.

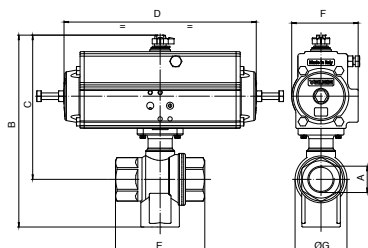

8P015100 (L)

Valve with Double Acting Actuator- Rotation 0°-180°

	*02	*03	*04	*05	*06	*07	*08	*10
PN	25	25	25	16	16	10	10	10
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	156	156	167	184	194	206	225	253
C	130	130	133	144	147	151	163	180
D	197	197	197	197	197	197	197	233
E	52	52	64	74	89	100	110	130
F	71	71	71	71	71	71	71	81
G	28	28	35	43	53	63	77	93
ACT.	DA 52	DA 52	DA 52	DA 52	DA 52	DA 52	DA 52	DA 63

Please specify the flow path when ordering.

Pneumatically Actuated Two-Way PVC Ball Valves 8P016100, 8P016200



8P016100


Valve with Double Acting Actuator

	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	10	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	10	10	10
A	160	160	175	176	211	218	228	233	263	296
B	188	188	210	215	257	270	290	320	368	425
ØC	54	54	65	73	86	98	122	164	203	238
D	71	71	71	71	81	81	81	81	95	106
E	103	103	115	128	146	164	199	235	270	308
F	141	141	141	141	164	164	164	164	210	241
ACT.	DA 52	DA 52	DA 52	DA 52	DA 63	DA 63	DA 63	DA 63	DA 75	DA 85

8P016200

Valve with Spring Return Actuator

	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	10	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	10	10	10
A	160	160	175	176	211	235	245	265	291	343
B	188	188	210	215	257	287	307	352	396	477
ØC	54	54	65	73	86	98	122	164	203	238
D	71	71	71	71	81	95	95	106	123	137
E	103	103	115	128	146	164	199	235	270	308
F	141	141	141	141	164	210	210	241	275	333
ACT.	SR 52	SR 52	SR 52	SR 52	SR 63	SR 75	SR 75	SR 85	SR 100	SR 115

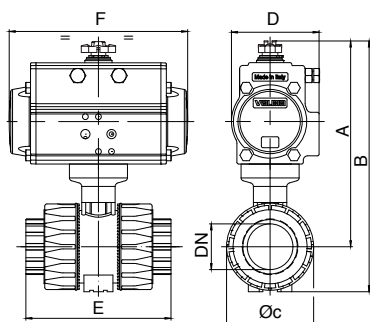

8P016100* Double Acting, **8P016200*** Single Acting:
2 way PVC ball valve with metric female connections
for solvent welding, with pneumatic actuator.

Pneumatically Actuated Three-Way PVC Ball Valves 8P016300 (T), 8P016700 (L) 8P016400 (T), 8P016800 (L)



8P016300 (T) - 8P016700 (L)

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10
DN	15	20	25	32	40	50
PN	16	16	16	16	16	16
A	152	170	175	190	194	211
B	184	209	220	241	251	280
C	59	73	80	95	110	134
D	71	81	81	81	81	81
E	118	145	160	189	219	267
F	141	164	164	164	164	164
ACT.	DA 52	DA 63	DA 63	DA 63	DA 63	DA 63


8P016400 (T) - 8P016800 (L)

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10
DN	15	20	25	32	40	50
PN	16	16	16	16	16	16
A	152	170	175	208	212	240
B	184	209	220	259	269	312
C	59	73	80	95	110	106
D	71	81	81	95	95	106
E	118	145	160	189	219	267
F	141	164	164	210	210	241
ACT.	SR 52	SR 63	SR 63	SR 75	SR 75	SR 85

Please specify the flow path when ordering.

**8P016300* (T), 8P016700* (L), 8P016400* (T),
8P016800* (L):**
3 way PVC ball valve, "T" or "L" port, with metric series
plain female ends for solvent welding, with pneumatic
actuator.

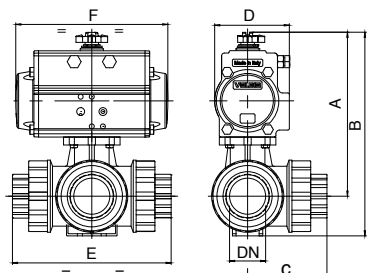

Pneumatically Actuated Two-Way Stainless Steel Ball Valves 8P000100, 8P000200



8P000100

Valve with Double Acting Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	140	140	140	105	105	64	64	64	25	25	25
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	121	121	127	210	219	229	269	301	341	364	430
C	106	106	109	188	192	197	229	253	281	292	341
D	45	45	45	71	71	71	81	95	106	106	123
E	55	55	66	79	93	100	110	131	159	185	222
F	110	110	110	141	141	141	164	210	241	241	275
ACT.	DA 32	DA 32	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100


8P000100* Double Acting, **8P000200*** Single Acting:

2 way ball valve (Part Number 700000), stainless steel AISI 316, threaded F/F, with pneumatic actuator.

8P000200

Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	140	140	140	105	105	64	64	64	25	25	25
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	157	157	163	222	231	241	301	328	409	443	476
C	142	142	145	200	204	209	261	281	348	371	387
D	71	71	71	81	81	81	106	123	137	148	148
E	55	55	66	79	93	100	110	131	159	185	222
F	141	141	141	164	164	164	241	275	333	372	372
ACT.	SR 52	SR 52	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

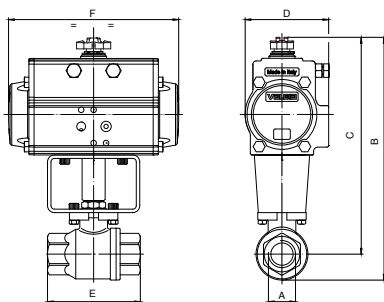

Pneumatically Actuated Two-Way Stainless Steel Direct Mount Ball Valves 8P000300, 8P000400



8P000300

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10
PN	64	64	64	64	64	64
DN - A	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	115	121	136	146	203	223
C	98	100	110	113	165	174
D	45	45	45	45	71	71
E	67	78	90	100	112	135
F	110	110	110	110	141	141
ACT.	DA 32	DA 32	DA 32	DA 32	DA 52	DA 52


8P000300* Double Acting, **8P000400*** Single Acting:

2-way ball valve (Part Number 703000), stainless steel AISI 316, threaded F/F, antistatic device with pneumatic actuator. Not suitable for use with solvents.

8P000400

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10
PN	64	64	64	64	64	64
DN - A	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	152	157	172	182	215	235
C	134	136	146	150	177	186
D	71	71	71	71	81	81
E	67	78	90	100	112	135
F	141	141	141	141	164	164
ACT.	SR 52	SR 52	SR 52	SR 52	SR 63	SR 63

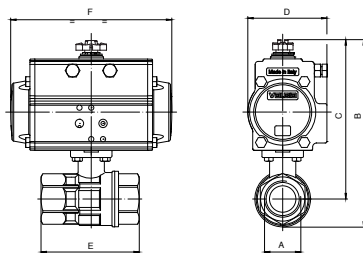

Pneumatically Actuated Three-Piece Carbon Steel Ball Valves

**8P001900 (F/F), 8P002000 (SW), 8P002100 (BW),
8P002500 (F/F), 8P002600 (SW), 8P002700 (BW)**



8P001900 F/F - 8P002000 SW - 8P002100 BW Valve with Double Acting Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 64	64	64	40	40	25	25	25	16	16	16
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	128	128	135	212	222	230	267	298	348	373	436
C	111	111	116	188	193	197	229	253	281	292	341
D	45	45	45	71	71	71	81	95	106	106	123
E	57	57	65	76	92	106	116	136	153	180	217
F	110	110	110	141	141	141	164	210	241	241	275
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	DA 32	DA 32	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100

8P002500 F/F - 8P002600 SW - 8P002700 BW Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 64	64	64	40	40	25	25	25	16	16	16
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	164	164	171	224	234	242	299	326	415	452	482
C	148	148	152	200	205	209	261	281	348	371	387
D	71	71	71	81	81	81	106	123	137	148	148
E	57	57	65	76	92	106	116	136	153	180	217
F	141	141	141	164	164	164	241	275	333	372	372
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	SR 52	SR 52	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

• Only for F/F

Pneumatically Actuated Three-Piece Stainless Steel Ball Valves

**8P000700 (F/F), 8P000800 (SW), 8P000900 (BW),
8P001300 (F/F), 8P001400 (SW), 8P001500 (BW)**




8P000700 F/F - 8P000800 SW - 8P000900 BW Valve with Double Acting Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 64	64	64	40	40	25	25	25	16	16	16
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	128	128	135	212	222	230	267	298	348	373	436
C	111	111	116	188	193	197	229	253	281	292	341
D	45	45	45	71	71	71	81	95	106	106	123
E	57	57	65	76	92	106	116	136	153	180	217
F	110	110	110	141	141	141	164	210	241	241	275
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	DA 32	DA 32	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100

8P001300 F/F - 8P001400 SW - 8P001500 BW Valve with Spring Return Actuator



	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 64	64	64	40	40	25	25	25	16	16	16
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	164	164	171	224	234	242	299	326	415	452	482
C	148	148	152	200	205	209	261	281	348	371	387
D	71	71	71	81	81	81	106	123	137	148	148
E	57	57	65	76	92	106	116	136	153	180	217
F	141	141	141	164	164	164	241	275	333	372	372
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	SR 52	SR 52	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

• Only for F/F

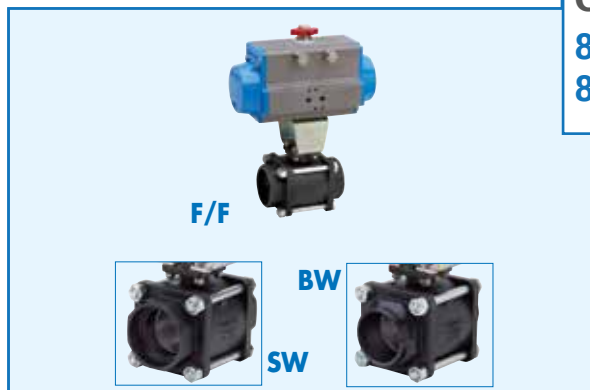


8P001900* F/F, 8P002000* SW, 8P002100* BW (double acting), **8P002500* F/F, 8P002600* SW, 8P002700* BW** (single acting):

2 way, three piece ball valve (Part Number 713000 F/F - 714000 SW - 715000 BW), carbon steel ASTM A105, with ball and stem in stainless steel AISI 304, with pneumatic actuator.

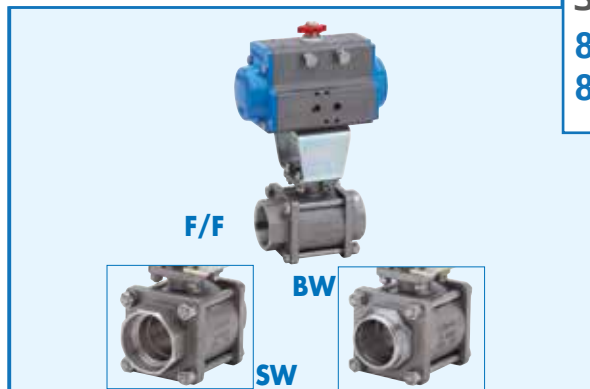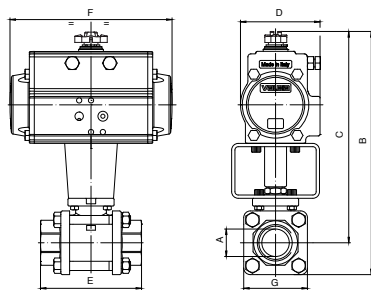

8P000700* F/F, 8P000800* SW, 8P000900* BW (double acting), **8P001300* F/F 8P001400* SW, 8P001500* BW**, (single acting):

2 way, three piece ball valve (Part Number 710000 F/F - 711000 SW - 712000 BW), stainless steel AISI 316, with pneumatic actuator.

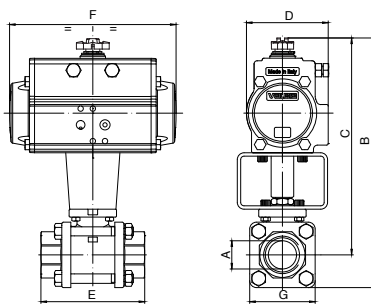

NEW

Pneumatically Actuated Three-Piece Carbon Steel Ball Valves – For Steam



8P002200 F/F vap, 8P002800 F/F vap, 8P002300 SW vap
8P002900 SW vap, 8P002400 BW vap, 8P003000 BW vap

F/F



BW



SW

8P002200* F/F vap, 8P002800* F/F vap, 8P002300* SW vap, 8P002900* SW vap, 8P002400* BW vap, 8P003000* BW vap:

2 way, three piece ball valve (Part Number 710063 F/F vap PN15 - 710064 SW vap PN15 - 710065 BW vap PN15), for STEAM, carbon steel ASTM A105, with ball and stem in stainless steel AISI 304, with pneumatic actuator.

8P002200 F/F vap - 8P002300 SW vap
8P002400 BW vap

Valve with Double Acting Actuator


	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 15	15	15	15	15	15	15	15	15	15	15
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	128	128	135	212	222	230	267	298	348	373	436
C	111	111	116	188	193	197	229	253	281	292	341
D	45	45	45	71	71	71	81	95	106	106	123
E	57	57	65	76	92	106	116	136	153	180	217
F	110	110	110	141	141	141	164	210	241	241	275
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	DA 32	DA 32	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100

8P002800 F/F vap - 8P002900 SW vap
8P003000 BW vap

Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 15	15	15	15	15	15	15	15	15	15	15
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	164	164	171	224	234	242	299	326	415	452	482
C	148	148	152	200	205	209	261	281	348	371	387
D	71	71	71	81	81	81	106	123	137	148	148
E	57	57	65	76	92	106	116	136	153	180	217
F	141	141	141	164	164	164	241	275	333	372	372
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	SR 52	SR 52	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

• Only for F/F

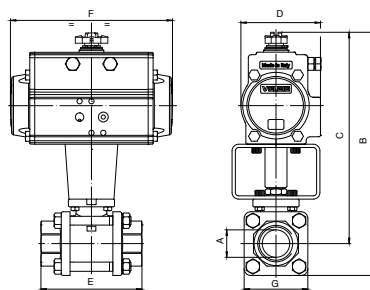**NEW**

Pneumatically Actuated Three-Piece Stainless Steel Ball Valves – For Steam



8P001000 F/F vap, 8P001600 F/F vap, 8P001100 SW vap
8P001700 SW vap, 8P001200 BW vap, 8P001800 BW vap

F/F



BW



SW

8P001000* F/F vap, 8P001600* F/F vap, 8P001100* SW vap, 8P001700* SW vap, 8P001200* BW vap, 8P001800* BW vap:

2 way, three piece ball valve, (Part Number 710060 F/F vap PN15 - 710061 SW vap PN15 - 710062 BW vap PN15) for STEAM, stainless steel AISI 316, with pneumatic actuator.

8P001000 F/F vap - 8P001100 SW vap
8P001200 BW vap

Valve with Double Acting Actuator


	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 15	15	15	15	15	15	15	15	15	15	15
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	128	128	135	212	222	230	267	298	348	373	436
C	111	111	116	188	193	197	229	253	281	292	341
D	45	45	45	71	71	71	81	95	106	106	123
E	57	57	65	76	92	106	116	136	153	180	217
F	110	110	110	141	141	141	164	210	241	241	275
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	DA 32	DA 32	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100

8P001600 F/F vap - 8P001700 SW vap
8P001800 BW vap

Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
PN	• 15	15	15	15	15	15	15	15	15	15	15
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
B	164	164	171	224	234	242	299	326	415	452	482
C	148	148	152	200	205	209	261	281	348	371	387
D	71	71	71	81	81	81	106	123	137	148	148
E	57	57	65	76	92	106	116	136	153	180	217
F	141	141	141	164	164	164	241	275	333	372	372
G	33	33	38	47	58	67	76	90	134	161	190
ACT.	SR 52	SR 52	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

• Only for F/F

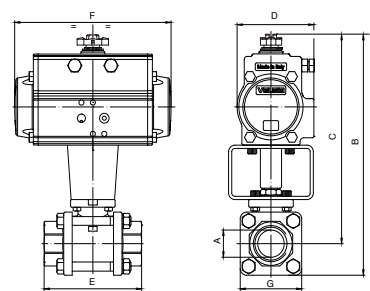

Pneumatically Actuated Carbon Steel Two-Way Ball Valve – High Pressure 8P013700, 8P013800



8P013700

Valve with Double Acting Actuator

	*03	*04	*05	*06	*07	*08	*10
PN	500	500	400	350	350	350	350
DN - A	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	182	196	226	237	292	306	347
C	164	178	203	207	245	252	290
D	71	81	95	95	123	123	137
E	73	83	95	112	115	131	140
F	141	164	210	210	275	275	333
G	35	37	45	55	88	102	118
ACT.	DA 52	DA 63	DA 75	DA 75	DA 100	DA 100	DA 115


8P013800

Valve with Spring Return Actuator

	*03	*04	*05	*06	*07	*08	*10
PN	500	500	400	350	350	350	350
DN - A	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	212	214	254	264	326	340	421
C	194	196	230	234	279	286	364
D	95	95	123	123	137	137	164
E	73	83	95	112	115	131	140
F	210	210	275	275	333	333	435
G	35	37	45	55	88	102	118
ACT.	SR 75	SR 75	SR 100	SR 100	SR 115	SR 115	SR 140

8P013700*, 8P013800*:

2 way ball valve, 9SMnPb36, F/F threaded, for high pressure, with pneumatic actuator. For hydraulic oil, emulsion, gas. For particular applications, refer to sales department.

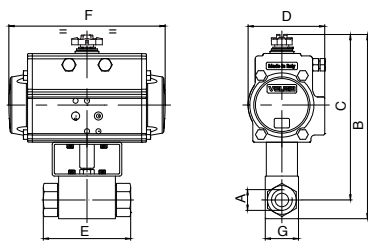

Pneumatically Actuated Stainless Steel Two-Way Ball Valve – High Pressure 8P022900, 8P023000



8P022900

Valve with Double Acting Actuator

	*03	*04	*05	*06	*07	*08	*10
PN	500	500	400	350	350	350	350
DN - A	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	182	196	226	237	292	306	347
C	164	178	203	207	245	252	290
D	71	81	95	95	123	123	137
E	73	83	95	112	115	131	140
F	141	164	210	210	275	275	333
G	35	37	45	55	88	102	118
ACT.	DA 52	DA 63	DA 75	DA 75	DA 100	DA 100	DA 115


8P023000

Valve with Spring Return Actuator

	*03	*04	*05	*06	*07	*08	*10
PN	500	500	400	350	350	350	350
DN - A	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	212	214	254	264	326	340	421
C	194	196	230	234	279	286	364
D	95	95	123	123	137	137	164
E	73	83	95	112	115	131	140
F	210	210	275	275	333	333	435
G	35	37	45	55	88	102	118
ACT.	SR 75	SR 75	SR 100	SR 100	SR 115	SR 115	SR 140

8P022900*, 8P023000*:

2 way ball valve, AISI 316L, F/F threaded, for high pressure, with pneumatic actuator. For hydraulic oil, emulsion, gas. For particular applications, refer to sales department.

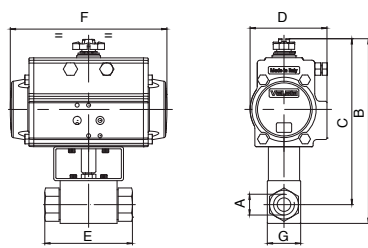


Pneumatically Actuated Three-Way Carbon Steel Ball Valve – High Pressure

8P015300 (L), 8P015400 (T) 8P015500 (L), 8P015600 (T)



**8P015300* (L), 8P015400* (T), 8P015500* (L),
8P015600* (T):**


3 way ball valve, 9SMnPb36, “L” or “T” port, diverting only, F/F/F threaded, for high pressure, with pneumatic actuator. For hydraulic oil, emulsion, gas. For particular applications, refer to sales department.

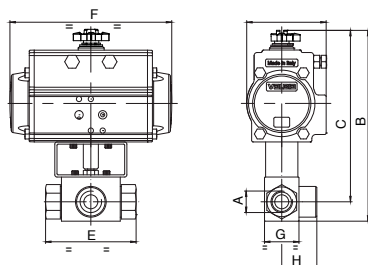

8P015300 (L), 8P015400 (T)

Valve with Double Acting Actuator

	*03	*04	*05	*06
PN	400	350	350	350
DN - A	3/8"	1/2"	3/4"	1"
B	182	196	226	236
C	164	178	203	207
D	71	81	95	95
E	73	83	95	112
F	141	164	210	210
G	35	37	45	55
H	37	40	52	60
ACT.	DA 52	DA 63	DA 75	DA 75

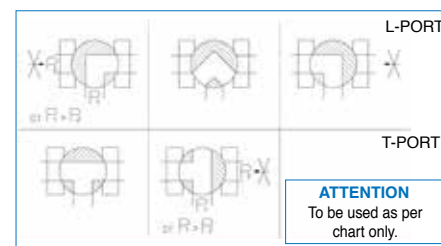

8P015500 (L), 8P015600 (T)

Valve with Spring Return Actuator

	*03	*04	*05	*06
PN	400	350	350	350
DN - A	3/8"	1/2"	3/4"	1"
B	211	214	253	263
C	194	196	230	234
D	95	95	123	123
E	73	83	95	112
F	210	210	275	275
G	35	37	45	55
H	37	40	52	60
ACT.	SR 75	SR 75	SR 100	SR 100

Please specify the flow path when ordering.

NEW


Pneumatically Actuated Three-Way Stainless Steel Ball Valve – High Pressure

8P023300 (L), 8P023400 (T) 8P023500 (L), 8P023600 (T)



**8P023300* (L), 8P023400* (T), 8P023500* (L),
8P023600* (T):**


3 way ball valve, AISI 316L, “L” or “T” port, diverting only, F/F/F threaded, for high pressure, with pneumatic actuator. For hydraulic oil, emulsion, gas. For particular applications, refer to sales department.

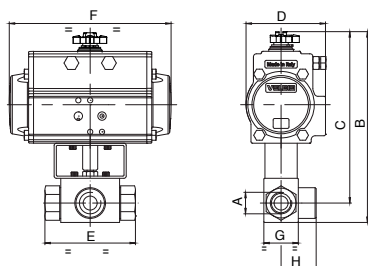

8P023300 (L), 8P023400 (T)

Valve with Double Acting Actuator

	*03	*04	*05	*06
PN	400	350	350	350
DN - A	3/8"	1/2"	3/4"	1"
B	182	196	226	236
C	164	178	203	207
D	71	81	95	95
E	73	83	95	112
F	141	164	210	210
G	35	37	45	55
H	37	40	52	60
ACT.	DA 52	DA 63	DA 75	DA 75

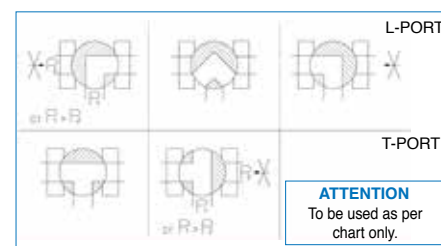

8P023500 (L), 8P023600 (T)

Valve with Spring Return Actuator

	*03	*04	*05	*06
PN	400	350	350	350
DN - A	3/8"	1/2"	3/4"	1"
B	211	214	253	263
C	194	196	230	234
D	95	95	123	123
E	73	83	95	112
F	210	210	275	275
G	35	37	45	55
H	37	40	52	60
ACT.	SR 75	SR 75	SR 100	SR 100

Please specify the flow path when ordering.

Pneumatically Actuated Three-Way Stainless Steel Ball Valves



8P005900 (T), 8P006000 (L)
8P006100 (T), 8P006200 (L)

8P005900 (T), 8P006000 (L)

Valve with Double Acting Actuator

	*02	*03	*04	*05	*06	*07	*08	*10
PN	64	64	64	64	64	64	64	64
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	195	195	199	231	239	266	294	309
C	179	179	183	210	214	219	260	269
D	71	71	71	81	81	81	106	106
E	70	70	76	87	103	118	126	149
F	141	141	141	164	164	164	241	241
G	35	35	38	45	52	58	63	75
ACT.	DA 52	DA 52	DA 52	DA 63	DA 63	DA 63	DA 85	DA 85

8P006100 (T), 8P006200 (L)

Valve with Spring Return Actuator

	*02	*03	*04	*05	*06	*07	*08	*10
PN	64	64	64	64	64	64	64	64
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	207	207	210	249	271	280	341	356
C	190	190	194	228	246	252	307	316
D	81	81	81	95	106	106	137	137
E	70	70	76	87	103	118	126	149
F	164	164	164	210	241	241	333	333
G	35	35	38	45	52	58	63	75
ACT.	SR 63	SR 63	SR 63	SR 75	SR 85	SR 85	SR 115	SR 115

Please specify the flow path when ordering.

NEW

Pneumatically Actuated Three-Way Stainless Steel Flanged Ball Valves



8P007100 (T), 8P007200 (L)
8P007500 (T), 8P007600 (L)

8P007100 (T), 8P007200 (L)

Valve with Double Acting Actuator

	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	10	15	20	25	32	40	50	65	80	100
PN	40	40	40	40	40	40	25	25	16	16
B	193	199	223	232	265	295	320	340	374	399
C	148	151	170	174	195	220	237	247	274	289
D	71	71	81	81	81	95	106	106	123	123
E	120	130	140	150	180	200	220	240	260	300
F	141	141	164	164	164	210	241	241	275	275
G	60	65	70	75	90	100	110	120	130	150
ACT.	DA 52	DA 52	DA 63	DA 63	DA 63	DA 75	DA 85	DA 85	DA 100	DA 100

8P007500 (T), 8P007600 (L)

Valve with Spring Return Actuator


	*03	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	10	15	20	25	32	40	50	65	80	100
PN	40	40	40	40	40	40	25	25	16	16
B	255	260	255	264	297	322	333	387	421	468
C	210	212	202	206	227	247	250	294	321	358
D	81	81	106	106	106	123	123	137	148	164
E	120	130	140	150	180	200	220	240	260	300
F	164	164	241	241	241	275	275	333	372	435
G	60	65	70	75	90	100	110	120	130	150
ACT.	SR 63	SR 63	SR 85	SR 85	SR 85	SR 100	SR 100	SR 115	SR 125	SR 140

Please specify the flow path when ordering.



**8P007100* (T), 8P007500* (T), 8P007200* (L),
8P007600* (L):**

3 way flanged polished ball valve from ingot, 4 seats, stainless steel AISI 316, FULL bore, "T" or "L" port, with pneumatic actuator.

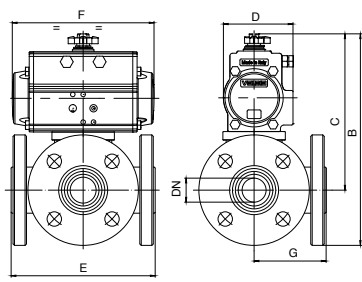

Pneumatically Actuated Three-Way Flanged PN16 'WAFFER' Ball Valve – Carbon Steel



8P005500 (L), 8P011300 (T)

8P005600 (L), 8P011400 (T)




8P005500 (L), 8P011300 (T)

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20
DN	15	20	25	32	40	50	65	80	100	125	150
PN	16	16	16	16	16	16	16	16	16	16	16
A	147	189	193	200	227	251	282	290	340	363	427
B	191	239	248	265	297	331	372	390	450	488	580
Ø C	89	99	109	130	140	160	180	200	220	250	306
D	45	71	71	71	81	95	106	106	123	123	148
E	40	40	46	58	71	82	106	122	152	196	242
F	110	141	141	141	164	210	241	241	275	275	372
Ø G	95	105	115	140	150	165	185	200	220	250	285
H	76	82	86	100	105	115	125	150	159	190	210
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 100	DA 125

8P005500* (L), 8P011300* (T), 8P005600* (L), 8P011400 (T):

3 way "WAFFER" ball valve (diverting), (Part Number 776000 (L) - 776001 (T)), "L" or "T" port, two seat design, flanged PN16, in carbon steel ASTM A105, REDUCED bore, with pneumatic actuator.

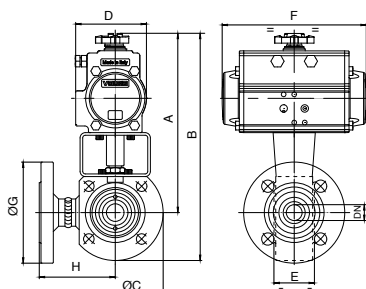

8P005600 (L), 8P011400 (T)

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20
DN	15	20	25	32	40	50	65	80	100	125	150
PN	16	16	16	16	16	16	16	16	16	16	16
A	183	199	204	212	259	278	349	370	387	409	449
B	228	249	259	277	329	358	439	470	497	534	602
Ø C	89	99	109	130	140	160	180	200	220	250	306
D	71	81	81	81	106	123	137	148	148	148	164
E	40	40	46	58	71	82	106	122	152	196	242
F	141	164	164	164	241	275	333	372	372	372	435
Ø G	95	105	115	140	150	165	185	200	220	250	285
H	76	82	86	100	105	115	125	150	159	190	210
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125	SR 125	SR 140

Please specify the flow path when ordering.

Pneumatically Actuated Three-Way Flanged PN16 'WAFFER' Ball Valve – Stainless Steel



8P005700 (L), 8P011500 (T)

8P005800 (L), 8P011600 (T)




8P005700 (L), 8P011500 (T)

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16
A	147	189	193	200	227	251	282	290	340
B	191	239	248	265	297	331	372	390	450
Ø C	89	99	109	130	140	160	180	200	220
D	45	71	71	71	81	95	106	106	123
E	40	40	46	58	71	82	106	122	152
F	110	141	141	141	164	210	241	241	275
Ø G	95	105	115	140	150	165	185	200	220
H	76	82	86	100	105	115	125	150	159
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100

8P005700* (L), 8P011500* (T), 8P005800* (L), 8P011600* (T):

3 way "WAFFER" ball valve (diverting), (Part Number 776007 (L) - 776010 (T)), "L" or "T" port, two seat design, flanged PN16, in stainless steel AISI 316, REDUCED bore, with pneumatic actuator.

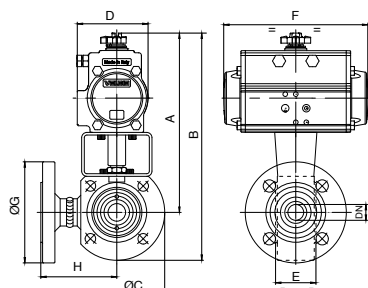

8P005800 (L), 8P011600 (T)

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16
A	183	199	204	212	259	278	349	370	387
B	228	249	259	277	329	358	439	470	497
Ø C	89	99	109	130	140	160	180	200	220
D	71	81	81	81	106	123	137	148	148
E	40	40	46	58	71	82	106	122	152
F	141	164	164	164	241	275	333	372	372
Ø G	95	105	115	140	150	165	185	200	220
H	76	82	86	100	105	115	125	150	159
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

Please specify the flow path when ordering.

NEW

Pneumatically Actuated Three-Way Flanged PN16 Ball Valve – Carbon Steel



8P028600 (L), 8P028700 (T)
8P028800 (L), 8P028900 (T)

8P028600 (L), 8P028700 (T)

Valve with Double Acting Actuator


	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16
A	185	207	222	253	260	282	306	380	376
B	233	257	277	318	335	367	411	495	515
ØC	95	100	109	130	150	170	210	229	278
D	71	81	81	95	95	106	123	137	137
E	97	108	115	140	150	167	185	216	250
F	141	164	164	210	210	241	275	333	333
G	32	40	41,5	52,5	56,5	62	70	127	150
ØH	/	/	/	/	/	/	/	212	239
ACT.	DA 52	DA 63	DA 63	DA 75	DA 75	DA 85	DA 100	DA 115	DA 115

8P028800 (L), 8P028900 (T)

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16
A	196	239	254	280	287	330	353	414	410
B	244	289	309	345	362	415	458	529	549
ØC	95	100	109	130	150	170	210	229	278
D	81	106	106	123	123	137	148	164	164
E	97	108	115	140	150	167	185	216	250
F	164	241	241	275	275	333	372	435	435
G	32	40	41,5	52,5	56,5	62	70	127	150
ØH	/	/	/	/	/	/	/	212	239
ACT.	SR 63	SR 85	SR 85	SR 100	SR 100	SR 115	SR 125	SR 140	SR 140

Please specify the flow path when ordering.

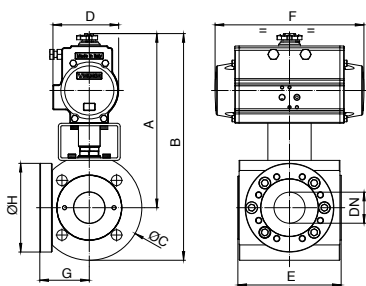

**8P028600 (L), 8P028700 (T), 8P028800 (L),
8P028900 (T):**

3-way ball valve type "COMBI-SFER" (Part Number 776601 (L) - 776600 (T)), "L" or "T" ported, with 4 seats, PN16 flanged, carbon steel ASTM A105, full bore, with pneumatic actuator.

NEW

Pneumatically Actuated Three-Way Flanged PN16 Ball Valve – Stainless Steel



8P028200 (L), 8P028300 (T)
8P028400 (L), 8P028500 (T)

8P028200 (L), 8P028300 (T)

Valve with Double Acting Actuator


	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16
A	185	207	222	253	260	282	306	380	376
B	233	257	277	318	335	367	411	495	515
ØC	95	100	109	130	150	170	210	229	278
D	71	81	81	95	95	106	123	137	137
E	97	108	115	140	150	167	185	216	250
F	141	164	164	210	210	241	275	333	333
G	32	40	41,5	52,5	56,5	62	70	127	150
ØH	/	/	/	/	/	/	/	212	239
ACT.	DA 52	DA 63	DA 63	DA 75	DA 75	DA 85	DA 100	DA 115	DA 115

8P028400 (L), 8P028500 (T)

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16
A	196	239	254	280	287	330	353	414	410
B	244	289	309	345	362	415	458	529	549
ØC	95	100	109	130	150	170	210	229	278
D	81	106	106	123	123	137	148	164	164
E	97	108	115	140	150	167	185	216	250
F	164	241	241	275	275	333	372	435	435
G	32	40	41,5	52,5	56,5	62	70	127	150
ØH	/	/	/	/	/	/	/	212	239
ACT.	SR 63	SR 85	SR 85	SR 100	SR 100	SR 115	SR 125	SR 140	SR 140

Please specify the flow path when ordering.

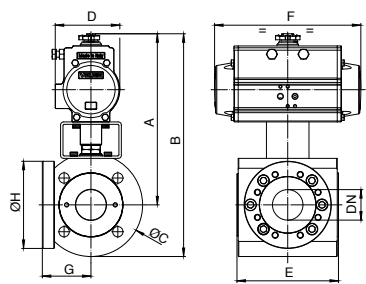

**8P028200 (L), 8P028300 (T), 8P028400 (L),
8P028500 (T):**

3-way ball valve type "COMBI-SFER" (Part Number 776401 (L) - 776400 (T)), "L" or "T" ported, with 4 seats, PN16 flanged, stainless steel AISI 316, full bore, with pneumatic actuator.

Pneumatically Actuated Two-Way Flanged PN16 'WAFER' Ball Valve – Carbon Steel



8P003500, 8P003700



8P003500

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	147	188	201	200	227	253	285	292	341	398	435	Part Number 8P011900
B	192	238	259	270	302	336	378	392	451	523	577	
C	90	100	115	140	150	165	185	200	220	250	285	
D	45	71	71	71	81	95	106	106	123	137	148	
E	35	40	46	54	64	82	103	122	152	196	232	
F	110	141	141	141	164	210	241	241	275	333	372	
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 115	DA 125	


8P003700

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	183	200	205	212	259	281	349	372	387	432	481	Part Number 8P012000
B	288	250	260	277	329	356	437	466	497	557	631	
C	90	100	110	130	140	150	175	190	220	250	300	
D	71	81	81	81	106	123	137	148	148	164	186	
E	35	40	46	54	64	82	103	122	152	196	232	
F	141	164	164	164	241	275	333	372	372	435	500	
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125	SR 140	SR 160	

8P003500*, 8P003700*:

2 way "WAFER" ball valve (Part Number 722000), flanged, carbon steel ASTM A105, with ball and stem in stainless steel AISI 304, with pneumatic actuator.

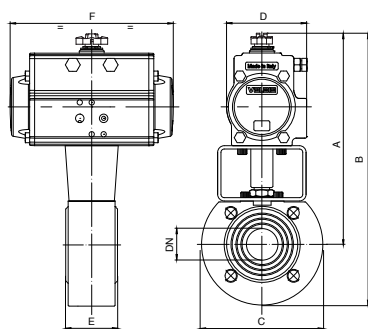

NEW

Pneumatically Actuated Two-Way Flanged PN16 'WAFER' Ball Valve – Carbon Steel – Fire Safe



8P026700, 8P026800



8P026700

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	147	188	193	200	227	253	282	292	341	398	435	Part Number 8P011900
B	192	238	248	266	297	328	370	387	451	523	585	
C	90	100	110	130	140	150	175	190	220	250	300	
D	45	71	71	71	81	95	106	106	123	137	148	
E	35	40	46	54	64	82	103	122	152	196	232	
F	110	141	141	141	164	210	241	241	275	333	372	
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 115	DA 125	


8P026800

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	183	200	205	212	259	281	349	372	387	432	481	Part Number 8P012000
B	228	250	260	277	329	356	437	466	497	557	631	
C	90	100	110	130	140	150	175	190	220	250	300	
D	71	81	81	81	106	123	137	148	148	164	186	
E	35	40	46	54	64	82	103	122	152	196	232	
F	141	164	164	164	241	275	333	372	372	435	500	
ACT.	SR52	SR63	SR63	SR63	SR85	SR100	SR115	SR125	SR125	SR140	SR160	

8P026700*, 8P026800*:

2 way "WAFER" ball valve (Part Number 720185), carbon steel ASTM A105, fire safe, antistatic device, classified ATEX Ex II 2 G/D c T3 with pneumatic actuator classified ATEX Ex II 2 G/D T6.

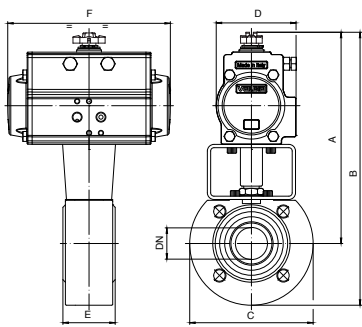

NEW

Pneumatically Actuated Two-Way Flanged ANSI 300 'WAFER' Ball Valve – Carbon Steel

8P004100, 8P004200

**8P004100**

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20
DN	15	20	25	32	40	50	65	80	100	150
PN	50	50	50	50	50	50	50	50	50	50
A	187	206	212	212	249	277	325	333	386	481
B	235	266	272	277	324	359	420	438	513	641
C	95	120	120	130	150	165	190	210	254	320
D	71	81	81	81	95	106	123	123	137	186
E	35	40	46	54	64	82	103	122	152	232
F	141	164	164	164	210	241	275	275	333	500
ACT.	DA 52	DA 63	DA 63	DA 63	DA 75	DA 85	DA 100	DA 100	DA 115	DA 160


8P004200

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20
DN	15	20	25	32	40	50	65	80	100	150
PN	50	50	50	50	50	50	50	50	50	50
A	199	238	244	244	276	324	371	379	445	699
B	247	298	304	309	351	406	466	484	572	859
C	95	120	120	130	150	165	190	210	254	320
D	81	106	106	106	123	137	148	148	186	290
E	35	40	46	54	64	82	103	122	152	232
F	164	241	241	241	275	333	372	372	500	672
ACT.	SR 63	SR 85	SR 85	SR 85	SR 100	SR 115	SR 125	SR 125	SR 160	SR 270

8P004100*, 8P004200*:

2 way "WAFER" ball valve (Part Number 720232), flanged ANSI 300, carbon steel ASTM A105 with ball and stem in stainless steel AISI 304, with pneumatic actuator.

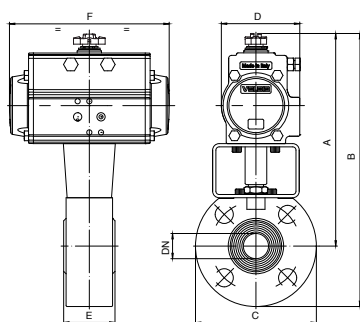**NEW**

Pneumatically Actuated Two-Way Flanged PN16/PN40 'WAFER SPLIT' Ball Valve – Carbon Steel – Fire Safe



8P012700, 8P012800

8P012700

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	40	40	40	40	40	40	16	16	16
A	148	190	199	205	235	262	289	295	341
B	193	238	252	270	305	337	371	380	451
C	90	95	110	130	140	150	180	190	220
D	45	71	71	71	81	95	106	106	123
E	53	53	57	65	79	84	103	122	155
F	110	141	141	141	164	210	241	241	275
G	22	22	24	30	37.5	42	50.5	61	77.5
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100


8P012800

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	40	40	40	40	40	40	16	16	16
A	184	201	210	216	267	289	336	355	387
B	229	249	265	281	337	364	426	450	497
C	90	95	110	130	140	150	180	190	220
D	71	81	81	81	106	123	137	148	148
E	53	53	57	65	79	84	103	122	155
F	141	164	164	164	241	275	333	372	372
G	22	22	24	30	37.5	42	50.5	61	77.5
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

8P012700*, 8P012800*:

"WAFER SPLIT" (Part Number 764000), full bore flanged ball valve, carbon steel ASTM A105, fire safe, antistatic device, with pneumatic actuator.

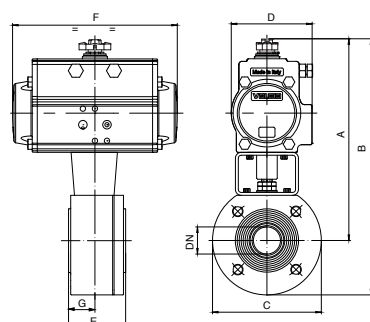

Pneumatically Actuated Two-Way Flanged PN 16 'WAFFER' Ball Valves – Stainless Steel



8P003200, 8P003400



8P003200

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	147	188	201	200	227	253	285	292	341	398	435	Part Number 8P011700
B	192	238	259	270	302	336	378	392	451	523	577	
C	90	100	115	140	150	165	185	200	220	250	285	
D	45	71	71	71	81	95	106	106	123	137	148	
E	35	40	46	54	64	82	103	122	152	196	232	
F	110	141	141	141	164	210	241	241	275	333	372	
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 115	DA 125	


8P003400

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	183	200	207	212	259	281	352	371	387	432	481	Part Number 8P011800
B	228	250	265	287	334	363	445	471	497	557	624	
C	90	100	115	140	150	165	185	200	220	250	285	
D	71	81	81	81	106	123	137	148	148	164	187	
E	35	40	46	54	64	82	103	122	152	196	232	
F	141	164	164	164	241	275	333	372	372	435	500	
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125	SR 140	SR 160	

8P003200*, 8P003400*:

2 way "WAFFER" ball valve (Part Number 721000 Stainless Steel CF8M), flanged, stainless steel CF8M, with pneumatic actuator.

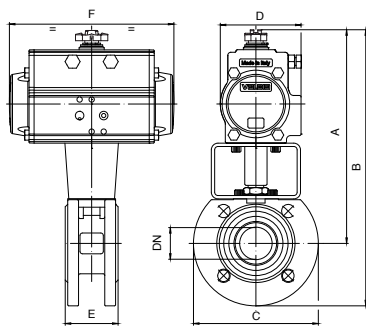

NEW

Pneumatically Actuated Two-Way Flanged PN 16 'WAFFER' Ball Valves – Stainless Steel – Fire Safe



8P026500, 8P026600



8P026500

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	147	188	201	200	227	253	285	292	341	398	435	Part Number 8P011700
B	192	238	259	270	302	336	378	392	451	523	577	
C	90	100	115	140	150	165	185	200	220	250	285	
D	45	71	71	71	81	95	106	106	123	137	148	
E	35	40	46	54	64	82	103	122	152	196	232	
F	110	141	141	141	164	210	241	241	275	333	372	
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 115	DA 125	


8P026600

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21
DN	15	20	25	32	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16	16	16	16	16
A	183	200	207	212	259	281	352	371	387	432	481	Part Number 8P011800
B	228	250	265	287	334	363	445	471	497	557	624	
C	90	100	115	140	150	165	185	200	220	250	285	
D	71	81	81	81	106	123	137	148	148	164	187	
E	35	40	46	54	64	82	103	122	152	196	232	
F	141	164	164	164	241	275	333	372	372	435	500	
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125	SR 140	SR 160	

8P026500*, 8P026600*:

2 way "WAFFER" ball valve (Part Number 720184), stainless steel AISI 316, fire safe, antistatic device, classified ATEX Ex II 2 G/D c T3 with pneumatic actuator classified ATEX Ex II 2 G/D T6.

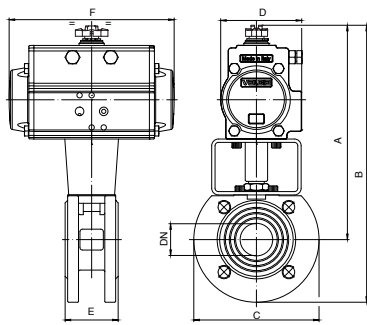

NEW

Pneumatically Actuated Two-Way Flanged ANSI 300 'WAFER' Ball Valves – Stainless Steel

8P003900, 8P004000

**8P003900**

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20
DN	15	20	25	32	40	50	65	80	100	150
PN	50	50	50	50	50	50	50	50	50	50
A	187	206	212	212	249	277	325	333	386	481
B	235	266	272	277	324	359	420	438	513	641
C	95	120	120	130	150	165	190	210	254	320
D	71	81	81	81	95	106	123	123	137	186
E	35	40	46	54	64	82	103	122	152	232
F	141	164	164	164	210	241	275	275	333	500
ACT.	DA 52	DA 63	DA 63	DA 63	DA 75	DA 85	DA 100	DA 100	DA 115	DA 160


8P004000

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20
DN	15	20	25	32	40	50	65	80	100	150
PN	50	50	50	50	50	50	50	50	50	50
A	199	238	244	244	276	324	371	379	445	699
B	247	298	304	309	351	406	466	484	572	859
C	95	120	120	130	150	165	190	210	254	320
D	81	106	106	106	123	137	148	148	186	290
E	35	40	46	54	64	82	103	122	152	232
F	164	241	241	241	275	333	372	372	500	672
ACT.	SR 63	SR 85	SR 85	SR 85	SR 100	SR115	SR 125	SR 125	SR 160	SR 270

8P003900*, 8P004000*:

2 way "WAFER" ball valve (Part Number 720212), flanged ANSI 300, stainless steel AISI 316-CF8M, with pneumatic actuator.

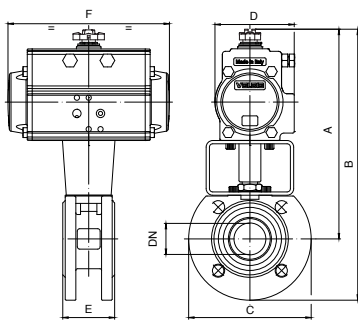**NEW**

Pneumatically Actuated Two-Way Flanged PN16/PN40 'WAFER SPLIT' Ball Valves – Stainless Steel – Fire Safe

8P012500, 8P012600

**8P012500**

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	40	40	40	40	40	40	16	16	16
A	148	190	199	205	235	262	289	295	341
B	193	238	252	270	305	337	371	380	451
C	90	95	110	130	140	150	180	190	220
D	45	71	71	71	81	95	106	106	123
E	53	53	57	65	79	84	103	122	155
F	110	141	141	141	164	210	241	241	275
G	22	22	24	30	37.5	42	50.5	61	77.5
ACT.	DA32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100


8P012600

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18
DN	15	20	25	32	40	50	65	80	100
PN	40	40	40	40	40	40	16	16	16
A	184	201	210	216	267	289	336	355	387
B	229	249	265	281	337	364	426	450	497
C	90	95	110	130	140	150	180	190	220
D	71	81	81	81	106	123	137	148	148
E	53	53	57	65	79	84	103	122	155
F	141	164	164	164	241	275	333	372	372
G	22	22	24	30	37.5	42	50.5	61	77.5
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

8P012500*, 8P012600*:

"WAFER SPLIT" full bore flanged ball valve (Part Number 763000), stainless steel AISI 316, fire safe, antistatic device, with pneumatic actuator.

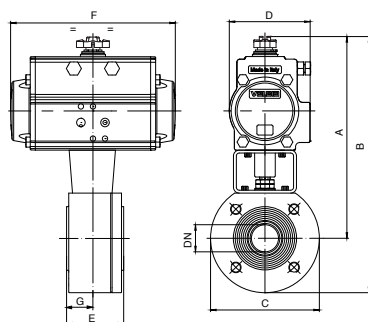

Pneumatically Actuated Two-Way Flanged PN16 Ball Valve – Cast Iron with Stainless Steel Ball



8P004300, 8P004400



8P004300

Valve with Double Acting Actuator

	*08	*10	*12	*14	*18	*19	*20	*21
DN	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16
A	227	252	280	291	343	400	435	499
B	302	335	373	391	453	525	578	669
C	150	165	185	200	220	250	285	340
D	81	95	106	106	123	137	148	164
E	140	150	170	180	190	200	210	400
F	164	210	241	241	275	333	372	435
ACT.	DA 63	DA 75	DA 85	DA 85	DA 100	DA 115	DA 125	DA 140


8P004400

Valve with Spring Return Actuator

	*08	*10	*12	*14	*18	*19	*20	*21
DN	40	50	65	80	100	125	150	200
PN	16	16	16	16	16	16	16	16
A	259	279	348	371	389	434	481	523
B	334	362	441	471	499	559	624	693
C	150	165	185	200	220	250	285	340
D	106	123	137	148	148	164	186	186
E	140	150	170	180	190	200	210	400
F	241	275	333	372	372	435	500	500
ACT.	SR 85	SR 100	SR 115	SR 125	SR 125	SR 140	SR 160	SR 160

8P004300*, 8P004400*:

2 way flanged PN16 ball valve (Part Number 730007 from DN40 to DN65 - Part Number 730003 from DN80 to DN200), cast iron, with ball and stem in stainless steel AISI 304, full bore, face to face to EN558 basic series 14 (DN200 basic series 27) with pneumatic actuator.

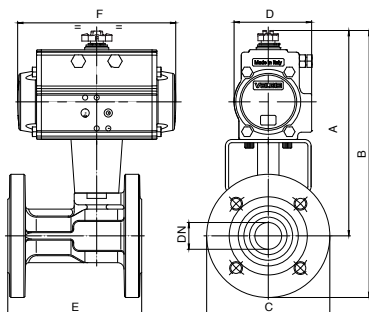

Pneumatically Actuated Two-Way Flanged PN16 Ball Valve – Cast Iron with Brass Ball



8P004500, 8P004600



8P004500

Valve with Double Acting Actuator

	*06	*07	*08	*10	*12	*14	*18	*19	*20
DN	25	32	40	50	65	80	100	125	150
PN	16	16	16	16	16	16	16	16	16
A	191	198	227	252	280	291	343	400	435
B	249	268	302	335	373	391	453	525	578
C	115	140	150	165	185	200	220	250	285
D	71	71	81	95	106	106	123	137	148
E	125	130	140	150	170	180	190	200	210
F	141	141	164	210	241	241	275	333	372
ACT.	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 115	DA 125


8P004600

Valve with Spring Return Actuator

	*06	*07	*08	*10	*12	*14	*18	*19	*20
DN	25	32	40	50	65	80	100	125	150
PN	16	16	16	16	16	16	16	16	16
A	203	209	259	279	348	371	389	434	481
B	261	279	334	362	441	471	499	559	624
C	115	140	150	165	185	200	220	250	285
D	81	81	106	123	137	148	148	164	186
E	125	130	140	150	170	180	190	200	210
F	164	164	241	275	333	372	372	435	500
ACT.	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125	SR 140	SR 160

8P004500*, 8P004600*:

2 way flanged PN16 ball valve (Part Number 730008 from DN25 to DN65 - part. 730000 from DN80 to DN150), cast iron, with chrome plated ball, full bore, face to face to EN558 basic series 14 (DN200 basic series 27) with pneumatic actuator.

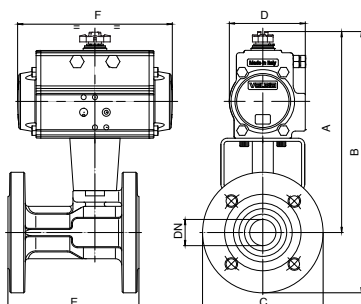

NEW

Pneumatically Actuated Two-Way Flanged PN40/PN16 ISO DM Ball Valve – Carbon Steel



8P050400, 8P050500

8P050400

Valve with Double Acting Actuator

	*06	*07	*08	*10	*12	*14	*18
DN	25	32	40	50	65	80	100
PN	40	40	40	40	16	16	16
A	160	173	193	221	256	265	292
B	217	243	268	303	349	365	402
C	115	140	150	165	185	200	220
D	71	71	81	95	106	106	123
E	125	130	140	150	170	180	190
F	141	141	164	210	241	241	275
G	53	55	52	58	63	76	80
ACT.	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100


8P050500

Valve with Spring Return Actuator

	*06	*07	*08	*10	*12	*14	*18
DN	25	32	40	50	65	80	100
PN	40	40	40	40	16	16	16
A	171	184	225	247	303	325	339
B	229	254	300	330	396	425	449
C	115	140	150	165	185	200	220
D	81	81	106	123	137	148	148
E	125	130	140	150	170	180	190
F	164	164	241	275	333	372	372
G	53	55	52	58	63	76	80
ACT.	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

8P050400*, 8P050500*:

Flanged PN16 carbon steel WCB ball valve, full bore "SPLIT BODY" type (Part Number 765001) ISO 5211 pad direct mount, fire safe, antistatic device, EN558 basic series 27 face to face dimension, with pneumatic actuator.

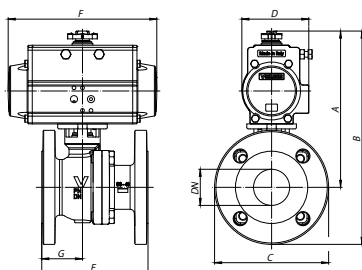**NEW**

Pneumatically Actuated Two-Way Flanged PN40/PN16 ISO DM Ball Valve – Stainless Steel



8P050200, 8P050300

8P050200

Valve with Double Acting Actuator

	*06	*07	*08	*10	*12	*14	*18
DN	25	32	40	50	65	80	100
PN	40	40	40	40	16	16	16
A	160	173	193	221	256	265	292
B	217	243	268	303	349	365	402
C	115	140	150	165	185	200	220
D	71	71	81	95	106	106	123
E	125	130	140	150	170	180	190
F	141	141	164	210	241	241	275
G	53	55	52	58	63	76	80
ACT.	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100


8P050300

Valve with Spring Return Actuator

	*06	*07	*08	*10	*12	*14	*18
DN	25	32	40	50	65	80	100
PN	40	40	40	40	16	16	16
A	171	184	225	247	303	325	339
B	229	254	300	330	396	425	449
C	115	140	150	165	185	200	220
D	81	81	106	123	137	148	148
E	125	130	140	150	170	180	190
F	164	164	241	275	333	372	372
G	53	55	52	58	63	76	80
ACT.	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125

8P050200*, 8P050300*:

Flanged PN16 stainless steel AISI 316-CF8M ball valve, full bore "SPLIT BODY" type (Part Number 765000) ISO 5211 pad direct mount, fire safe, antistatic device, EN558 basic series 27 face to face dimension, with pneumatic actuator.

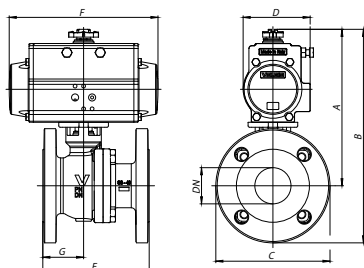

NEW

Pneumatically Actuated Two-Way Flanged ANSI 150 ISO DM Ball Valve – Carbon Steel



8P050800, 8P050900



8P050800

Valve with Double Acting Actuator

	*06	*08	*10	*14	*18
DN	25	40	50	80	100
PN	20	20	20	20	20
A	160	193	221	265	292
B	215	193	296	360	407
C	110	130	150	190	230
D	71	81	95	106	123
E	127	165	178	203	229
F	141	164	210	241	275
G	54	76	85	93	100
ACT.	DA 52	DA 63	DA 75	DA 85	DA 100


8P050900

Valve with Spring Return Actuator

	*06	*08	*10	*14	*18
DN	25	40	50	80	100
PN	20	20	20	20	20
A	171	225	247	325	339
B	226	290	322	419	454
C	110	130	150	190	230
D	81	106	123	148	148
E	127	165	178	203	229
F	164	241	275	372	372
G	54	76	85	93	100
ACT.	SR 63	SR 85	SR 100	SR 125	SR 125

8P050800*, 8P050900*:

Flanged ANSI 150 carbon steel WCB ball valve, full bore "SPLIT BODY" type (Part Number 766001) ISO 5211 pad direct mount, fire safe, antistatic device, ANSI B 16.10 face to face dimension, with pneumatic actuator.

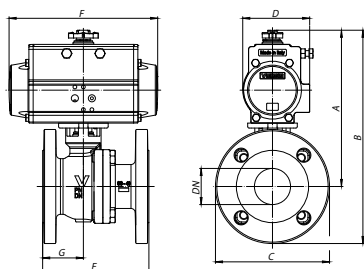**NEW**

Pneumatically Actuated Two-Way Flanged ANSI 150 ISO DM Ball Valve – Stainless Steel



8P050600, 8P050700



8P050600

Valve with Double Acting Actuator

	*06	*08	*10	*14	*18
DN	25	40	50	80	100
PN	20	20	20	20	20
A	160	193	221	265	292
B	215	258	296	360	407
C	110	130	150	190	230
D	71	81	95	106	123
E	127	165	178	203	229
F	141	164	210	241	275
G	54	76	85	93	100
ACT.	DA 52	DA 63	DA 75	DA 85	DA 100


8P050700

Valve with Spring Return Actuator

	*06	*08	*10	*14	*18
DN	25	40	50	80	100
PN	20	20	20	20	20
A	171	225	247	325	339
B	226	290	322	419	454
C	110	130	150	190	230
D	81	106	123	148	148
E	127	165	178	203	229
F	164	241	275	372	372
G	54	76	85	93	100
ACT.	SR 63	SR 85	SR 100	SR 125	SR 125

8P050600*, 8P050700*:

Flanged ANSI 150 stainless steel AISI 316-CF8M ball valve, full bore "SPLIT BODY" type (Part Number 766000) ISO 5211 pad direct mount, fire safe, antistatic device, ANSI B 16.10 face to face dimension, with pneumatic actuator.

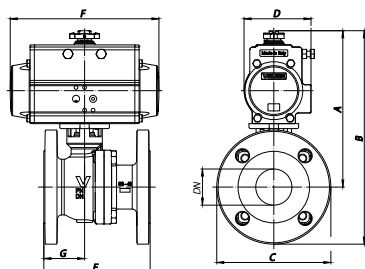

**Pneumatically Actuated Two-Way Flanged PN16
'SPLIT BODY' Ball Valve – Carbon Steel – DIN 3202 F4 /F5**



8P011900, 8P012000

8P011900

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	15	20	25	32	40	50	65	80	100	125	150	200	*250	*300
PN	40	40	40	40	40	40	16	16	16	16	16	16	16	16
A	148	189	207	210	250	275	299	333	360	382	462	527	747	778
B	195	242	265	280	325	357	392	433	470	507	605	697	950	1008
C	95	105	115	140	150	165	185	200	220	250	285	340	405	460
D	45	71	71	71	81	95	106	106	123	123	148	164	249	249
E	115	120	125	130	140	150	170	180	190	325	350	400	450	500
F	110	141	141	141	164	210	241	241	275	275	372	435	690	690
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 100	DA 125	DA 140	DA 230	DA 230

* Trunnion $\Delta p=10$ bar

8P012000

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	15	20	25	32	40	50	65	80	100	125	150	200	*250	*300
PN	40	40	40	40	40	40	16	16	16	16	16	16	16	16
A	184	200	219	222	282	302	346	393	407	452	508	551	947	978
B	232	253	277	292	357	385	439	493	517	577	651	721	1150	1208
C	95	105	115	140	150	165	185	200	220	250	285	340	405	460
D	71	81	81	81	106	123	137	148	148	164	186	186	402	402
E	115	120	125	130	140	150	170	180	190	325	350	400	450	500
F	141	164	164	164	241	275	333	372	372	435	500	500	881	881
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125	SR 140	SR 160	SR 160	SR 330	SR 330

* Trunnion $\Delta p=10$ bar

**Pneumatically Actuated Two-Way Flanged PN16
'SPLIT BODY' Ball Valve – Stainless Steel – DIN 3202 F4 /F5**



8P011700, 8P011800

8P011700

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	15	20	25	32	40	50	65	80	100	125	150	200	*250	*300
PN	40	40	40	40	40	40	16	16	16	16	16	16	16	16
A	148	189	207	210	250	275	299	333	360	382	462	527	747	778
B	195	242	265	280	325	357	392	433	470	507	604	697	950	1008
C	95	105	115	140	150	165	185	200	220	250	285	340	405	460
D	45	71	71	71	81	95	106	106	123	123	148	164	249	249
E	115	120	125	130	140	150	170	180	190	325	350	400	450	500
F	110	141	141	141	164	210	241	241	275	275	372	435	690	690
ACT.	DA 32	DA 52	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85	DA 100	DA 100	DA 125	DA 140	DA 230	DA 230

* Trunnion $\Delta p=10$ bar

8P011800

Valve with Spring Return Actuator


	*04	*05	*06	*07	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	15	20	25	32	40	50	65	80	100	125	150	200	*250	*300
PN	40	40	40	40	40	40	16	16	16	16	16	16	16	16
A	184	200	219	222	282	302	346	393	407	452	508	552	947	978
B	232	253	277	292	357	385	439	493	517	577	651	722	1150	1208
C	95	105	115	140	150	165	185	200	220	250	285	340	405	460
D	71	81	81	81	106	123	137	148	148	164	186	186	402	402
E	115	120	125	130	140	150	170	180	190	325	350	400	450	500
F	141	164	164	164	241	275	333	372	372	435	500	500	881	881
ACT.	SR 52	SR 63	SR 63	SR 63	SR 85	SR 100	SR 115	SR 125	SR 125	SR 140	SR 160	SR 160	SR 330	SR 330

* Trunnion $\Delta p=10$ bar




8P011900*, 8P012000*:

"SPLIT BODY" type flanged PN16 ball valve (Part Number 760001), carbon steel WCB, full bore, fire safe, antistatic device, face to face to EN558 basic series 27, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

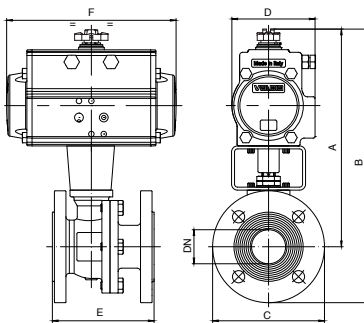

8P011700*, 8P011800*:

"SPLIT BODY" (Part Number 760000), full bore, flanged PN16 ball valve, stainless steel AISI 316-CF8M, fire safe, antistatic device, face to face EN 558 basic series 27, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

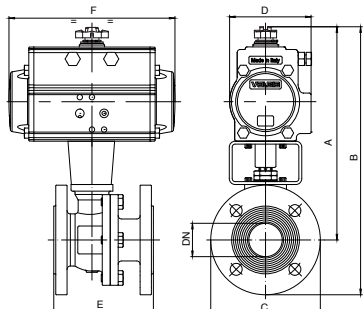

Pneumatically Actuated Two-Way Flanged ANSI 150 'SPLIT BODY' Ball Valve – Carbon Steel



8P012300, 8P012400



8P012300

Valve with Double Acting Actuator

	*04	*05	*06	*08	*10	*14	*18	*20	*21	*77	*78
DN	15	20	25	40	50	80	100	150	200	*250	*300
PN	20	20	20	20	20	20	20	20	20	10	10
A	148	189	207	249	275	333	360	462	527	747	778
B	193	239	262	314	350	428	475	602	700	950	1021
C	90	100	110	130	150	190	230	285	345	405	485
D	45	71	71	81	95	106	123	148	164	249	249
E	108	117	127	165	178	203	229	394	457	533	560
F	110	141	141	164	210	241	275	372	435	690	690
ACT.	DA 32	DA 52	DA 52	DA 63	DA 75	DA 85	DA 100	DA 125	DA 140	DA 230	DA 230

* Trunnion $\Delta p=10$ bar

8P012400

Valve with Spring Return Actuator

	*04	*05	*06	*08	*10	*14	*18	*20	*21	*77	*78
DN	15	20	25	40	50	80	100	150	200	*250	*300
PN	20	20	20	20	20	20	20	20	20	10	10
A	185	200	218	281	302	393	407	508	551	947	978
B	230	250	273	346	377	488	522	648	724	1150	1221
C	90	100	110	130	150	190	230	280	345	405	485
D	71	81	81	106	123	148	148	186	186	402	402
E	108	117	127	165	178	203	229	394	457	533	610
F	141	164	164	241	275	372	372	500	500	881	881
ACT.	SR 52	SR 63	SR 63	SR 85	SR 100	SR 125	SR 125	SR 160	SR 160	SR 330	SR 330

* Trunnion $\Delta p=10$ bar

Pneumatically Actuated Two-Way Flanged ANSI 150 'SPLIT BODY' Ball Valve – Stainless Steel



8P012100, 8P012200



8P012100

Valve with Double Acting Actuator

	*04	*05	*06	*08	*10	*14	*18	*20	*21	*77	*78
DN	15	20	25	40	50	80	100	150	200	*250	*300
PN	20	20	20	20	20	20	20	20	20	10	10
A	148	189	207	249	275	333	360	462	527	747	778
B	193	239	262	314	350	428	475	602	700	950	1021
C	90	100	110	130	150	190	230	280	345	405	485
D	45	71	71	81	95	106	123	148	164	249	249
E	108	117	127	165	178	203	229	394	457	533	560
F	110	141	141	164	210	241	275	372	435	690	690
ACT.	DA 32	DA 52	DA 52	DA 63	DA 75	DA 85	DA 100	DA 125	DA 140	DA 230	DA 230

* Trunnion $\Delta p=10$ bar

8P012200


Valve with Spring Return Actuator

	*04	*05	*06	*08	*10	*14	*18	*20	*21	*77	*78
DN	15	20	25	40	50	80	100	150	200	250	300
PN	20	20	20	20	20	20	20	20	20	10	10
A	185	200	218	281	302	393	407	508	551	947	978
B	230	250	273	346	377	488	522	648	724	1150	1221
C	90	100	110	130	150	190	230	280	345	405	485
D	71	81	81	106	123	148	148	186	186	402	402
E	108	117	127	165	178	203	229	394	457	533	610
F	141	164	164	241	275	372	372	500	500	881	881
ACT.	SR 52	SR 63	SR 63	SR 85	SR 100	SR 125	SR 125	SR 160	SR 160	SR 330	SR 330

* Trunnion $\Delta p=10$ bar


8P012300*, 8P012400*:

"SPLIT BODY" type flanged ANSI 150 ball valve (Part Number 762000), carbon steel WCB, full bore, fire safe, antistatic device, face to face to ANSI B16.10, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

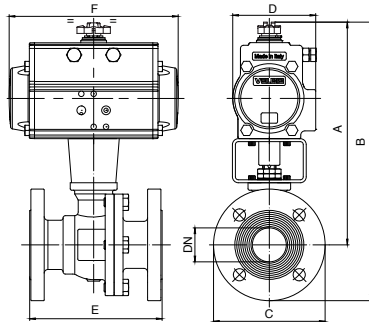

8P012100*, 8P012200*:

"SPLIT BODY" type flanged ANSI150 ball valve (Part Number 760005), stainless steel AISI 316-CF8M, full bore, fire safe, antistatic device, face to face to ANSI B16.10, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

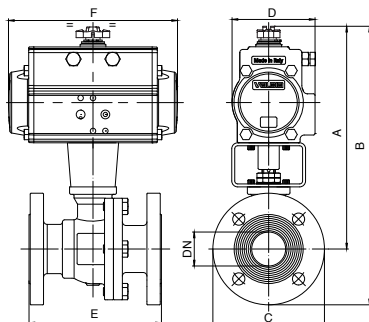

NEW

Pneumatically Actuated Two-Way Flanged PN40 'SPLIT BODY' Ball Valve – Carbon Steel



8P024600, 8P024800

8P024600

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20	*21
DN	15	20	25	32	40	50	65	80	100	150	200
PN	40	40	40	40	40	40	40	40	40	40	40
A	Part. 8P011900	Part. 8P011900	Part. 8P011900	Part. 8P011900	Part. 8P011900	Part. 8P011900	312	346	395	610	610
B							405	446	513	798	798
C							185	200	235	375	375
D							123	123	137	217	217
E							170	180	190	400	400
F							275	275	333	579	579
ACT.							DA 100	DA 100	DA 115	DA 200	DA 200

* Trunnion $\Delta p=25$ bar

8P024800


Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20	*21
DN	15	20	25	32	40	50	65	80	100	150	*200
PN	40	40	40	40	40	40	40	40	40	40	40
A	Part. 8P012000	Part. 8P012000	Part. 8P012000	Part. 8P012000	Part. 8P012000	Part. 8P012000	358	393	453	771	771
B							451	493	571	959	959
C							185	200	235	375	375
D							148	148	186	290	290
E							170	180	190	400	400
F							372	372	500	672	672
ACT.							SR 125	SR 125	SR 160	SR 270	SR 270

* Trunnion $\Delta p=25$ bar

8P024600*, 8P024800*:

"SPLIT BODY" type flanged PN40 ball valve (Part Number 760041), carbon steel WCB, full bore, fire safe, antistatic device, face to face to EN558 basic series 27, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

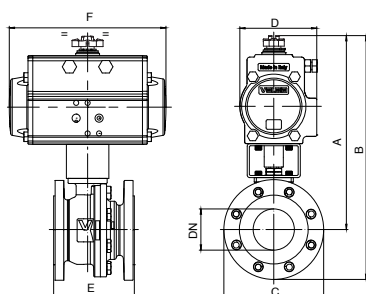**NEW**

Pneumatically Actuated Two-Way Flanged PN40 'SPLIT BODY' Ball Valve – Stainless Steel



8P024500, 8P024700

8P024500

Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20	*21
DN	15	20	25	32	40	50	65	80	100	150	*200
PN	40	40	40	40	40	40	40	40	40	40	40
A	Part. 8P011700	Part. 8P011700	Part. 8P011700	Part. 8P011700	Part. 8P011700	Part. 8P011700	312	346	395	508	610
B							405	446	513	658	798
C							185	200	235	300	375
D							123	123	137	186	217
E							170	180	190	350	400
F							275	275	333	500	579
ACT.							DA 100	DA 100	DA 115	DA 160	DA 200

* Trunnion $\Delta p=10$ bar

8P024700


Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14	*18	*20	*21
DN	15	20	25	32	40	50	65	80	100	150	*200
PN	40	40	40	40	40	40	40	40	40	40	40
A	Part. 8P011800	Part. 8P011800	Part. 8P011800	Part. 8P011800	Part. 8P011800	Part. 8P011800	358	393	453	726	771
B							451	493	571	876	959
C							185	200	235	300	375
D							148	148	186	290	290
E							170	180	190	350	400
F							372	372	500	672	672
ACT.							SR 125	SR 125	SR 160	SR 270	SR 270

* Trunnion $\Delta p=10$ bar

8P024500*, 8P024700*:

"SPLIT BODY" type flanged PN40 ball valve (Part Number 760040), stainless steel AISI 316-CF8M, full bore, fire safe, antistatic device, face to face to EN558 basic series 27, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

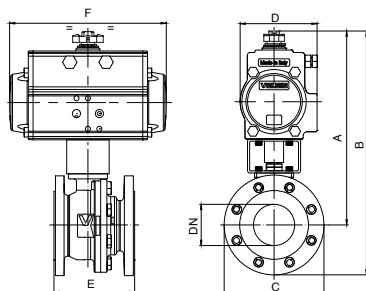

NEW

Pneumatically Actuated Two-Way Flanged ANSI 300 'SPLIT BODY' Ball Valve – Carbon Steel



8P021500, 8P021600



8P021500,


Valve with Double Acting Actuator

	*04	*05	*06	*08	*10	*12	*18	*20	*21
DN	15	20	25	40	50	80	100	150	*200
PN	50	50	50	50	50	50	50	50	25
A	185	200	218	268	289	346	395	508	608
B	233	259	281	346	372	451	523	668	798
C	95	118	125	155	165	210	255	320	381
D	71	81	81	95	106	123	137	186	217
E	140	152	165	190	216	283	305	403	502
F	141	164	164	210	241	275	333	500	579
G	62	61	71	79	86	81	89	172	251
ACT.	DA 52	DA 63	DA 63	DA 75	DA 85	DA 100	DA 115	DA 160	DA 200

* Trunnion $\Delta p=25$ bar

8P021500*, 8P021600*:

"SPLIT BODY" type flanged ANSI 300 ball valve (Part Number 761031), carbon steel WCB, full bore, fire safe, antistatic device, face to face to ANSI B16.10, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

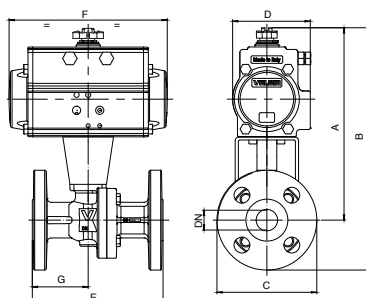

8P021600

Valve with Spring Return Actuator

	*04	*05	*06	*08	*10	*12	*18	*20	*21
DN	15	20	25	40	50	80	100	150	*200
PN	50	50	50	50	50	50	50	50	25
A	196	232	250	295	336	393	453	726	769
B	244	291	313	373	419	498	581	886	959
C	95	118	125	155	165	210	255	320	381
D	81	106	106	123	137	148	186	290	290
E	140	152	165	190	216	283	305	403	502
F	164	241	241	275	333	372	500	672	672
G	62	61	71	79	86	81	89	172	251
ACT.	SR 63	SR 85	SR 85	SR 100	SR 115	SR 125	SR 160	SR 270	SR 270

* Trunnion $\Delta p=25$ bar
NEW

Pneumatically Actuated Two-Way Flanged ANSI 300 'SPLIT BODY' Ball Valve – Stainless Steel



8P021300, 8P021400



8P021300


Valve with Double Acting Actuator

	*04	*05	*06	*08	*10	*12	*18	*20	*21
DN	15	20	25	40	50	80	100	150	*200
PN	50	50	50	50	50	50	50	50	50
A	185	200	218	268	289	346	395	508	608
B	233	259	281	346	372	451	523	668	798
C	95	118	125	155	165	210	255	320	381
D	71	81	81	95	106	123	137	186	217
E	140	152	165	190	216	283	305	403	502
F	141	164	164	210	241	275	333	500	579
G	62	61	71	79	86	81	89	172	251
ACT.	DA 52	DA 63	DA 63	DA 75	DA 85	DA 100	DA 115	DA 160	DA 200

* Trunnion $\Delta p=25$ bar

8P021300*, 8P021400*:

"SPLIT BODY" type flanged ANSI 300 ball valve (Part Number 761030), stainless steel AISI 316-CF8M, full bore, fire safe, antistatic device, face to face to ANSI B16.10, classified ATEX Ex II 2 G/D c T3, with pneumatic actuator classified ATEX Ex II 2 G/D T6.

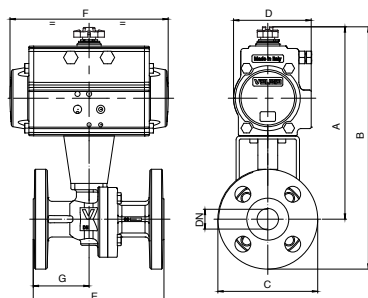

8P021400

Valve with Spring Return Actuator

	*04	*05	*06	*08	*10	*12	*18	*20	*21
DN	15	20	25	40	50	80	100	150	*200
PN	50	50	50	50	50	50	50	50	50
A	196	232	250	295	336	393	453	726	769
B	244	291	313	373	419	498	581	886	959
C	95	118	125	155	165	210	255	320	381
D	81	106	106	123	137	148	186	290	290
E	140	152	165	190	216	283	305	403	502
F	164	241	241	275	333	372	500	672	672
G	62	61	71	79	86	81	89	172	251
ACT.	SR 63	SR 85	SR 85	SR 100	SR 115	SR 125	SR 160	SR 270	SR 270

* Trunnion $\Delta p=25$ bar

NEW

Pneumatically Actuated Two-Way Flanged ANSI 600 'SPLIT BODY' Ball Valve – Carbon Steel



8P027100, 8P027200

8P027100

Valve with Double Acting Actuator

	*04	*05	*06	*08	*10	*14	*18
DN	15	20	25	40	50	80	100
PN	100	100	100	100	100	100	100
A	185	188	218	280	279	377	429
B	232	246	281	358	361	482	567
C	95	115	125	155	165	210	275
D	71	71	81	106	106	148	164
E	165	191	216	241	292	356	432
F	141	141	164	241	241	372	435
ACT.	DA 52	DA 52	DA 63	DA 85	DA 85	DA 125	DA 140


8P027200

Valve with Spring Return Actuator

	*04	*05	*06	*08	*10	*14	*18
DN	15	20	25	40	50	80	100
PN	100	100	100	100	100	100	100
A	196	218	250	328	326	423	485
B	244	275	313	405	409	528	623
C	95	115	125	155	165	210	275
D	81	95	106	137	137	186	213
E	165	191	216	241	292	356	432
F	164	210	241	333	333	500	493
ACT.	SR 63	SR 75	SR 85	SR 115	SR 115	SR 160	SR 180

8P027100*, 8P027200*:

"SPLIT BODY" full bore (Part Number 760150), flanged ball valve, ANSI 600, carbon steel A350-LF2, antistatic device, ANSI B16.10, with pneumatic actuator.

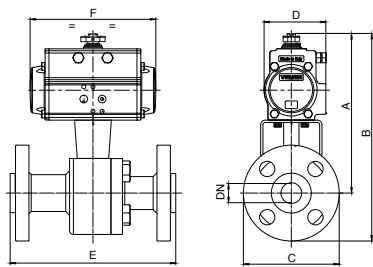**NEW**

Pneumatically Actuated Two-Way Flanged ANSI 600 'SPLIT BODY' Ball Valve – Stainless Steel



8P027300, 8P027400

8P027300

Valve with Double Acting Actuator

	*04	*05	*06	*08	*10	*14	*18
DN	15	20	25	40	50	80	100
PN	100	100	100	100	100	100	100
A	185	188	218	280	279	377	429
B	232	246	281	358	361	482	567
C	95	115	125	155	165	210	275
D	71	71	81	106	106	148	164
E	165	191	216	241	292	356	432
F	141	141	164	241	241	372	435
ACT.	DA 52	DA 52	DA 63	DA 85	DA 85	DA 125	DA 140


8P027400

Valve with Spring Return Actuator

	*04	*05	*06	*08	*10	*14	*18
DN	15	20	25	40	50	80	100
PN	100	100	100	100	100	100	100
A	196	218	250	328	326	423	485
B	244	275	313	405	409	528	623
C	95	115	125	155	165	210	275
D	81	95	106	137	137	186	213
E	165	191	216	241	292	356	432
F	164	210	241	333	333	500	493
ACT.	SR 63	SR 75	SR 85	SR 115	SR 115	SR 160	SR 180

8P027300*, 8P027400*:

"SPLIT BODY" full bore (Part Number 760200), flanged ball valve, ANSI 600, Stainless Steel AISI316, antistatic device, ANSI B16.10, with pneumatic actuator.

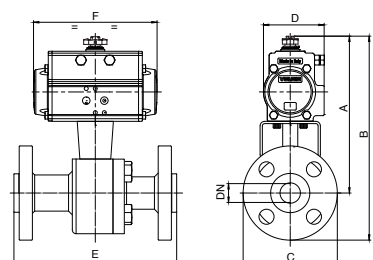

Pneumatically Actuated 'WAFER' Butterfly Valve – Stainless Steel Disc EPDM/NBR Seat



**8P010100, 8P019700,
8P010200, 8P019800**


8P010100 (EPDM), 8P019700 (NBR)

Valve with Double Acting Actuator

	*07	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	32	40	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16	16	16
A	224	224	255	267	281	315	327	355	434	482	541
B	282	294	326	345	370	417	450	493	602	689	784
Ø C	85	95	100	120	127	161	190	215	268	325	400
D	71	71	71	71	81	95	95	106	137	148	164
E	33	33	43	46	46	52	56	56	60	68	78
F	141	141	141	141	164	210	210	241	333	372	435
ACT.	DA 52	DA 52	DA 52	DA 52	DA 63	DA 75	DA 75	DA 85	DA115	DA125	DA140

**8P010100* EPDM, 8P019700* NBR,
8P010200* EPDM, 8P019800* NBR:**

Butterfly valve "WAFER" type PN16, body in cast iron G250 + epoxy painting, disc AISI 316, EPDM (Part Number 600105) or NBR (Part Number 600119) seat, with pneumatic actuator.



8P010200 (EPDM), 8P019800 (NBR)

Valve with Spring Return Actuator

	*07	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	32	40	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16	16	16
A	231	235	266	279	312	328	354	366	469	524	672
B	290	305	338	357	401	430	477	504	637	731	915
Ø C	85	95	100	120	127	161	190	215	268	325	400
D	81	81	81	81	106	106	123	123	164	186	213
E	33	33	43	46	46	52	56	56	60	68	78
F	164	164	164	164	241	241	275	275	435	500	493
ACT.	SR 63	SR 63	SR 63	SR 63	SR 85	SR 85	SR 100	SR 100	SR 140	SR 160	SR180

Pneumatically Actuated 'WAFER' Butterfly Valve – Ductile Iron Nickled Disc EPDM/NBR Seat



**8P009700, 8P019500,
8P009800, 8P019600**


8P009700 (EPDM), 8P019500 (NBR)

Valve with Double Acting Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	255	267	281	315	327	355	434	482	541
B	326	345	370	417	450	493	602	689	784
Ø C	100	120	127	161	190	215	268	325	400
D	71	71	81	95	95	106	137	148	164
E	43	46	46	52	56	56	60	68	78
F	141	141	164	210	210	241	333	372	435
ACT.	DA 52	DA 52	DA 63	DA 75	DA 75	DA 85	DA115	DA125	DA140

**8P009700* EPDM, 8P019500* NBR,
8P009800* EPDM, 8P019600* NBR:**

Butterfly valve "WAFER" type PN16, body in cast iron G250 + epoxy painting, disc in GGG40 nickled, EPDM (Part Number 600104) or NBR (Part Number 600117) seat, with pneumatic actuator.

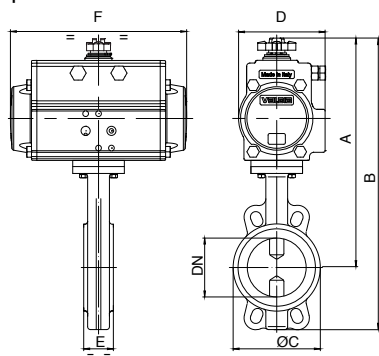

8P009800 (EPDM), 8P019600 (NBR)

Valve with Spring Return Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	266	279	312	328	354	366	469	524	672
B	338	357	401	430	477	504	637	731	915
Ø C	100	120	127	161	190	215	268	325	400
D	81	81	106	106	123	123	164	186	213
E	43	46	46	52	56	56	60	68	78
F	164	164	241	241	275	275	435	500	493
ACT.	SR 63	SR 63	SR 85	SR 85	SR 100	SR 100	SR 140	SR 160	SR180

Pneumatically Actuated 'WAFER' LUGGED PN16 Valve – Stainless Steel Disc EPDM/NBR Seat



**8P010900, 8P019900,
8P011000, 8P020000**

8P010900 (EPDM), 8P019900 (NBR)

Valve with Double Acting Actuator

	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	40	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16	16
A	224	255	267	281	315	327	355	434	482	541
B	294	326	345	370	417	450	493	602	689	784
Ø C	145	165	185	200	220	250	285	268	325	400
D	71	71	71	81	95	95	106	137	148	164
E	33	43	46	46	52	56	56	60	68	78
F	141	141	141	164	210	210	241	333	372	435
ACT.	DA 52	DA 52	DA 52	DA 63	DA 75	DA 75	DA 85	DA115	DA125	DA140


8P011000 (EPDM), 8P020000 (NBR)

Valve with Spring Return Actuator

	*08	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	40	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16	16
A	235	266	279	312	328	354	366	469	524	672
B	305	338	357	401	430	477	504	637	731	915
Ø C	145	165	185	200	220	250	285	340	405	400
D	81	81	81	106	106	123	123	164	186	213
E	33	43	46	46	52	56	56	60	68	78
F	164	164	164	241	241	275	275	435	500	493
ACT.	SR 63	SR 63	SR 63	SR 85	SR 85	SR 100	SR 100	SR 140	SR 160	SR180

8P010900* EPDM, **8P019900*** NBR,
8P011000* EPDM, **8P020000*** NBR:

Butterfly valve "LUG" type PN16, body in cast iron GGG40 + epoxy painting, disc AISI 316, EPDM seat (Part Number 600205) or NBR (Part Number 600230), with pneumatic actuator.

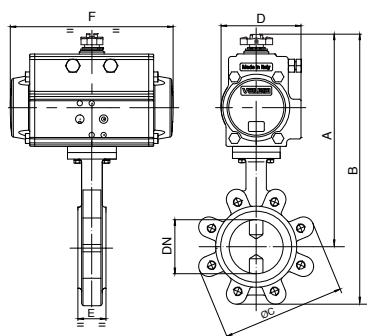

Pneumatically Actuated 'WAFER' LUGGED PN16 Valve – Ductile Iron Nickled Disc EPDM/NBR Seat



**8P010500, 8P020100,
8P010600, 8P020200**

8P010500 (EPDM), 8P020100 (NBR)

Valve with Double Acting Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	255	267	281	315	327	355	434	482	541
B	326	345	370	417	450	493	602	689	784
Ø C	165	185	200	220	250	285	268	325	400
D	71	71	81	95	95	106	137	148	164
E	43	46	46	52	56	56	60	68	78
F	141	141	164	210	210	241	333	372	435
ACT.	DA 52	DA 52	DA 63	DA 75	DA 75	DA 85	DA115	DA125	DA140


8P010600 (EPDM), 8P020200 (NBR)

Valve with Spring Return Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	266	279	312	328	354	366	469	524	672
B	338	357	401	430	477	504	637	731	915
Ø C	165	185	200	220	250	285	340	405	400
D	81	81	106	106	123	123	164	186	213
E	43	46	46	52	56	56	60	68	78
F	164	164	241	241	275	275	435	500	493
ACT.	SR 63	SR 63	SR 85	SR 85	SR 100	SR 100	SR 140	SR 160	SR180

8P010500* EPDM, **8P020100*** NBR,
8P010600* EPDM, **8P020200*** NBR:

Butterfly valve "LUG" type PN16, body in cast iron GGG40 + epoxy painting, disc GGG40 nickled, EPDM seat (Part Number 600204) or NBR (Part Number 600231) seat, with pneumatic actuator.

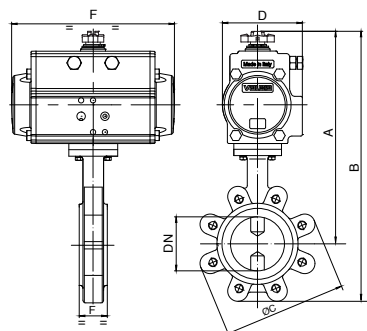

NEW

Pneumatically Actuated 'WAFER' Butterfly Valve – Stainless Steel Disc VITON Seat



8P020500, 8P020600


8P020500 VITON

Valve with Double Acting Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	255	267	281	315	327	355	434	482	541
B	326	345	370	417	450	493	602	689	784
Ø C	100	120	127	161	190	215	268	325	400
D	71	71	81	95	95	106	137	148	164
E	43	46	46	52	56	56	60	68	78
F	141	141	164	210	210	241	333	372	435
ACT.	DA 52	DA 52	DA 63	DA 75	DA 75	DA 85	DA115	DA125	DA140

8P020500*, 8P020600*:

Butterfly valve "WAFER" type PN16, G250 cast iron + epoxy painting, AISI 316 disc, Viton seat max operating temperature 160°C, with pneumatic actuator with Viton seals.

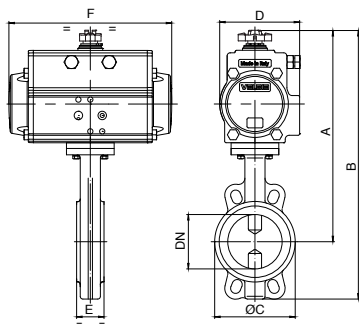

8P020600 VITON

Valve with Spring Return Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	266	279	312	328	354	366	469	524	672
B	338	357	401	430	477	504	637	731	915
Ø C	100	120	127	161	190	215	268	325	400
D	81	81	106	106	123	123	164	186	213
E	43	46	46	52	56	56	60	68	78
F	164	164	241	241	275	275	435	500	493
ACT.	SR 63	SR 63	SR 85	SR 85	SR 100	SR 100	SR 140	SR 160	SR180

NEW

Pneumatically Actuated 'WAFER' LUGGED Valve – Stainless Steel Disc VITON Seat



8P020900, 8P021000


8P020900 VITON

Valve with Double Acting Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	255	267	281	315	327	355	434	482	541
B	326	345	370	417	450	493	602	689	784
Ø C	165	185	200	220	250	285	268	325	400
D	71	71	81	95	95	106	137	148	164
E	43	46	46	52	56	56	60	68	78
F	141	141	164	210	210	241	333	372	435
ACT.	DA 52	DA 52	DA 63	DA 75	DA 75	DA 85	DA115	DA125	DA140

8P020900*, 8P021000*:

Butterfly valve "LUG" type PN16, GGG40 cast iron + epoxy painting, AISI 316 disc, Viton seat max operating temperature 160° C, with pneumatic actuator with Viton seals.

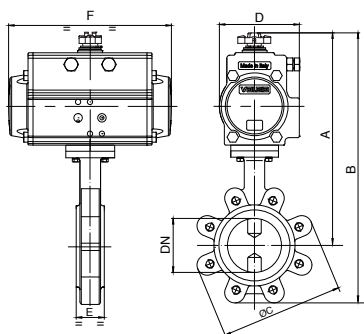

8P021000 VITON

Valve with Spring Return Actuator

	*10	*12	*14	*18	*19	*20	*21	*77	*78
DN	50	65	80	100	125	150	200	250	300
PN	16	16	16	16	16	16	16	16	16
A	266	279	312	328	354	366	469	524	672
B	338	357	401	430	477	504	637	731	915
Ø C	165	185	200	220	250	285	340	405	400
D	81	81	106	106	123	123	164	186	213
E	43	46	46	52	56	56	60	68	78
F	164	164	241	241	275	275	435	500	493
ACT.	SR 63	SR 63	SR 85	SR 85	SR 100	SR 100	SR 140	SR 160	SR180

Pneumatically Actuated PVC Butterfly Valve 8P016500, 8P016600



8P016500


Valve with Double Acting Actuator

	*08	*10	*12	*14	*18	*19	*20	*21
DN	40	50	65	80	100	125	150	200
PN	16	16	10	10	10	10	10	10
A	208	214	233	247	278	313	339	420
B	268	284	313	337	383	434	471	581
Ø C	132	147	165	130	150	185	210	325
D	71	71	81	81	95	106	123	137
E	33	43	46	49	56	64	70	71
F	141	141	164	164	210	241	275	333
ACT.	DA 52	DA 52	DA 63	DA 63	DA 75	DA 85	DA 100	DA 115

8P016600

Valve with Spring Return Actuator

	*08	*10	*12	*14	*18	*19	*20	*21
DN	40	50	65	80	100	125	150	200
PN	16	16	10	10	10	10	10	10
A	237	243	265	279	340	360	385	454
B	297	313	345	369	445	481	517	615
Ø C	132	147	165	130	150	185	210	325
D	95	95	106	106	137	137	148	164
E	33	43	46	49	56	64	70	71
F	210	210	241	241	333	333	372	435
ACT.	SR 75	SR 75	SR 85	SR 85	SR 115	SR 115	SR 125	SR 140

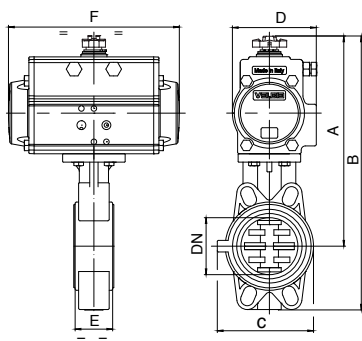

8P016500*, 8P016600*:

PVC butterfly valve with pneumatic actuator.

NEW

Pneumatically Actuated Brass Butterfly Valve – BSP Female Ends 8P021100, 8P021200



8P021100


Valve with Double Acting Actuator

	*04	*05	*06	*07	*08	*10	*12	*14
PN	16	16	16	16	16	16	16	16
DN - A	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
B	144	151	158	201	213	240	276	317
C	124	128	131	167	172	192	213	242
D	45	45	45	71	71	81	81	95
E	49	56	64	76	82	93	112	130
F	110	110	110	141	141	164	164	210
ØG	31	38	46	56	66	78	102	122
ACT.	DA 32	DA 32	DA 32	DA 52	DA 52	DA 63	DA 63	DA 75

8P021200

Valve with Spring Return Actuator

	*04	*05	*06	*07	*08	*10	*12	*14
PN	16	16	16	16	16	16	16	16
DN - A	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
B	181	189	195	212	242	258	308	331
C	161	165	168	178	201	210	245	256
D	71	71	71	81	95	95	106	106
E	49	56	64	76	82	93	112	130
F	141	141	141	164	210	210	241	241
ØG	31	38	46	56	66	78	102	122
ACT.	SR 52	SR 52	SR 52	SR 63	SR 75	SR 75	SR 85	SR 85

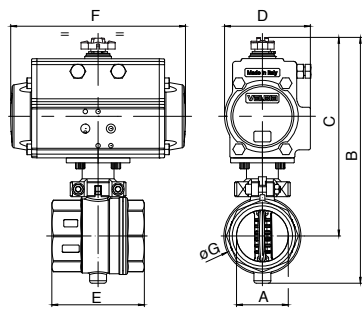

8P021100*, 8P021200*:

Brass butterfly valve full port (Part Number 600000), threaded F/F, with pneumatic actuator.

NEW

Pneumatically Actuated Stainless Steel Hygienic Butterfly Valve – RJT Male Ends

8P015700, 8P015800




8P015700

Valve with Double Acting Actuator

	*06	*07	*08	*10	*12	*14	*18
DN	25	32	40	50	65	80	100
PN	6	6	6	6	6	6	6
A	113	155	157	175	202	224	236
B	153	197	203	227	265	289	314
Ø C	79	85	92	105	125	137	157
D	45	71	71	81	95	106	106
E	68	76	76	80	82	84	88
F	110	141	141	164	210	241	241
ACT.	DA 32	DA 52	DA 52	DA 63	DA 75	DA 85	DA 85

8P015700*, 8P015800*:

Stainless steel AISI 304L butterfly valve for food industry, F/F DIN 11851 connections, with pneumatic actuator.

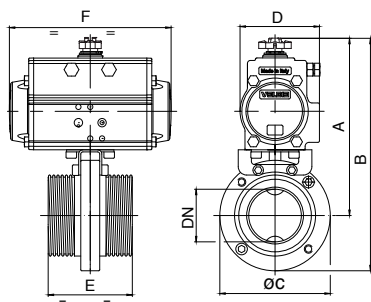

8P015800

Valve with Spring Return Actuator

	*06	*07	*08	*10	*12	*14	*18
DN	25	32	40	50	65	80	100
PN	6	6	6	6	6	6	6
A	150	155	169	193	216	224	249
B	189	197	215	245	279	292	327
Ø C	79	85	92	105	125	137	157
D	71	71	81	95	106	106	123
E	68	76	76	80	82	84	88
F	141	141	164	210	241	241	275
ACT.	SR 52	SR 52	SR 63	SR 75	SR 85	SR 85	SR 100

NEW

Pneumatically Actuated Stainless Steel Hygienic Butterfly Valve – TRI Clamp Ends

8P025900, 8P026000




8P025900

Valve with Double Acting Actuator

	*05	*06	*08	*10	*12	*14	*18
PN	6	6	6	6	6	6	6
CLAMP	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"
Ø A	19	25	38	51	63	76	101
B	113	113	155	174	197	202	223
C	138	153	197	227	254	265	302
Ø D	50	79	85	105	113	125	157
E	45	45	71	81	95	95	106
F	58	68	76	80	82	82	88
G	110	110	141	164	210	210	241

8P025900*, 8P026000*:

Butterfly valve, CLAMP connections, stainless steel AISI 304 with pneumatic actuator.

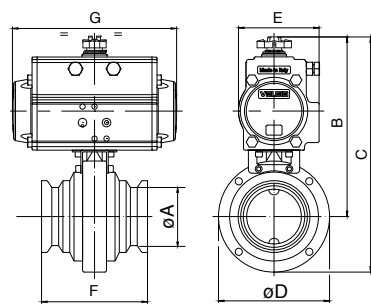

8P026000

Valve with Spring Return Actuator

	*05	*06	*08	*10	*12	*14	*18
PN	6	6	6	6	6	6	6
CLAMP	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"
Ø A	19	25	38	51	63	76	101
B	150	150	166	192	197	216	236
C	175	189	209	245	254	279	314
Ø D	50	79	85	105	113	125	157
E	71	71	81	95	95	106	123
F	58	68	76	80	82	82	88
G	141	141	164	210	210	241	275